


Potential Energy and Conservation Of Energy

→ Forces : [1] non conservation forces : Ex: friction.

[2] Conservation forces "F_{cons}" :

[1] work done by F_{cons} between 2 points don't depend on the path.

$$W_{a \rightarrow c \rightarrow d} = W_{a \rightarrow b \rightarrow d}$$



[2] work done by F_{cons} around a closed path equal zero.

$$W_{a \rightarrow b \rightarrow d \rightarrow c \rightarrow a} = \text{zero}$$

→ $W_{\text{cons}} = -\Delta U$, U: potential energy

$$\int F_{\text{cons}} dx = -\Delta U$$


$$\Delta U = - \int_{x_i}^{x_f} F_{\text{cons}} dx$$

$$U_f - U_i = - \int_{x_i}^{x_f} F_{\text{cons}} dx$$

Gravitational potential energy:

$$\Rightarrow U_f - U_i = - \int_{y_i}^{y_f} mg \, dy$$

$$= - \int_{y_i}^{y_f} mg \, dy$$

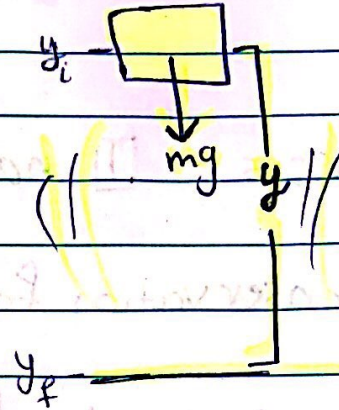


Spring potential energy:

$$\Rightarrow U_f - U_i = - \int_{x_i}^{x_f} +kx \, dx$$

$$= - \int_{x_i}^{x_f} kx \, dx$$

$$= k \frac{x^2}{2} \Big|_{x_i}^{x_f}$$

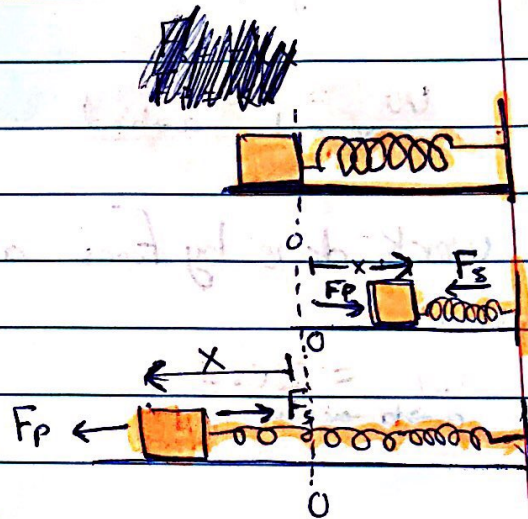

$$\Rightarrow U_f - U_i = \frac{1}{2} k (x_f^2 - x_i^2)$$

$$k (\Delta x)^2 = (x_f^2 - x_i^2)$$


Mechanical energy:

$$\Rightarrow \text{Mechanical energy} = K + U$$

→ Conservation of mechanical energy.

the only force acting on the system is

F_{cons} :

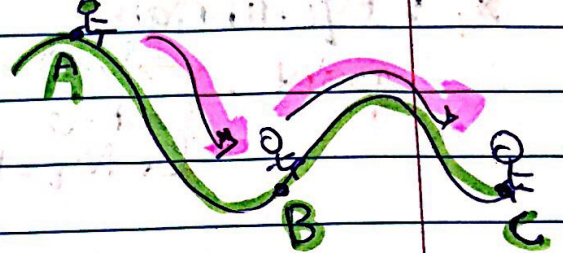

$W_{done\ by\ F_{cons}} = \Delta K$

$W_{done\ by\ F_{cons}} = -\Delta U$

$\therefore \Delta K = -\Delta U \Rightarrow \Delta K + \Delta U = \text{zero "constant"}$

$(K+U)_i = (K+U)_f$ [F_{cons} is acting only]

$M_E(A) = M_E(B) = M_E(C)$

Finding Conservative Force from U:

→ $F_{cons} dx = -du$

→ $F_{cons} = -\frac{du}{dx}$

→ $W = -\Delta U$


Reading potential energy curve:

m moves along the x -axis

$\Rightarrow F_{cons} = -\frac{dU}{dx}$ "slop"

x_1 : equilibrium point

$\begin{cases} \rightarrow U=0 \\ \rightarrow F=0 \\ \rightarrow M_E=K \end{cases}$

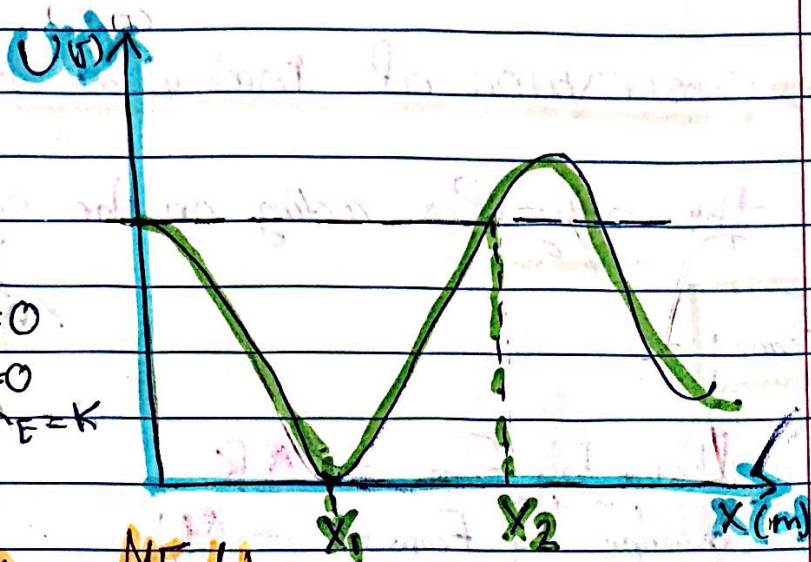

x_2 : Turning point

$\begin{cases} \rightarrow M_E=U \\ \rightarrow K=0 \\ \rightarrow F \neq 0 \end{cases}$

* When the system consists of conservative and non-conservative force:

$$W_{cons} + W_{non-cons} = \Delta K$$

$$-\Delta U + W_{non-cons} = \Delta K$$

$$W_{non-cons} = \Delta E = \Delta K + \Delta U$$

$$\begin{cases} \Delta E_{th} = \int k \cdot d \\ W = \Delta E_{mech} + \Delta E_{th} \end{cases}$$

Systems

1 without applied force

② closed with friction

① closed and no friction

2 with applied force
 with friction

$$\Delta E_{mec} + \Delta E_{th} = W_{app}$$

without friction

$$\Delta E_{mec} = W_{app}$$

$$\Delta E_{mec} + \Delta E_{th} = 0$$

$$\Delta E_{mec} = 0$$

~~x Note: $\Delta E_{th} = fkd$~~

$\Rightarrow \Delta E_{th} = fkd$

$\Rightarrow \Delta U_g = -W_g$

$\Rightarrow \Delta U_s = -W_s$

Center of Mass and Linear Momentum

9.1 Center of mass:

mass of a system on particles

Solid Bodies

x_{com}

y_{com}

z_{com}

$$\frac{m_1 x_1 + m_2 x_2 + \dots}{m_1 + m_2 + \dots}$$

$$\frac{m_1 y_1 + m_2 y_2 + \dots}{m_1 + m_2 + \dots}$$

$$\frac{m_1 z_1 + m_2 z_2 + \dots}{m_1 + m_2 + \dots}$$

$$x_{com} = \frac{1}{M} \int x \, dm$$

$$y_{com} = \frac{1}{M} \int y \, dm$$

$$z_{com} = \frac{1}{M} \int z \, dm$$

Note: $\rho = \frac{dm}{dv} = \frac{m}{V}$
density

9.2 Newton's second law for a system of particles

$$\frac{d}{dt} (M \vec{r}_{com} = m_1 \vec{r}_1 + m_2 \vec{r}_2 + \dots + m_n \vec{r}_n)$$

$$\frac{d}{dt} (M \vec{v}_{com} = m_1 \vec{v}_1 + m_2 \vec{v}_2 + \dots + m_n \vec{v}_n)$$

$$M \vec{a}_{com} = m_1 \vec{a}_1 + m_2 \vec{a}_2 + \dots + m_n \vec{a}_n$$


4.3 linear momentum

For one particle $\Rightarrow \frac{d}{dt} (\vec{p} = m\vec{v})$


$$\frac{d\vec{p}}{dt} = m \frac{d\vec{v}}{dt}$$

$$\frac{d\vec{p}}{dt} = m \vec{a}$$

$$\frac{d\vec{p}}{dt} = \vec{F}_{net}$$



of a system of particles $\Rightarrow \vec{p} = \vec{p}_1 + \vec{p}_2 + \dots + \vec{p}_n$



system of particles

$$\frac{d\vec{p}}{dt} = M \frac{d\vec{v}_{com}}{dt}$$

$$\frac{d\vec{p}}{dt} = M \vec{a}_{com}$$

$$M = m_1 + m_2 + \dots + m_n$$


$$\frac{d\vec{p}}{dt} = \vec{F}_{net}$$

4.4 Collision and Impulse

Impulse (\vec{J}):

$$\vec{J} = \Delta \vec{p}$$

$$\vec{J} = \vec{p}_f - \vec{p}_i$$

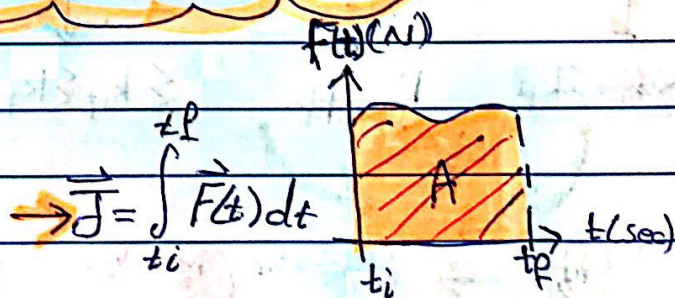

$$\vec{J} = F_{avg} \Delta t$$

9.5 Conservation of linear momentum

In the (closed, isolated systems) like collisions explosion and rocket motion in free space, $\vec{F}_{net} = 0$

so $\frac{d\vec{p}}{dt} = 0$ which mean that:-

$\vec{p} = \text{Constant}$

$\vec{p}_i = \vec{p}_f$


(total linear momentum at some initial time t_i) = (total linear momentum at some later time t_f)

9.6

Collisions <<1D>>


Elastic InElastic Completely InElastic

$\vec{p}_i = \vec{p}_f$ $\sum k_i = \sum k_f$ $\vec{p}_i = \vec{p}_f$ $\sum k_i \neq \sum k_f$ $\vec{p}_i = \vec{p}_f$ $\sum k_i \neq \sum k_f$

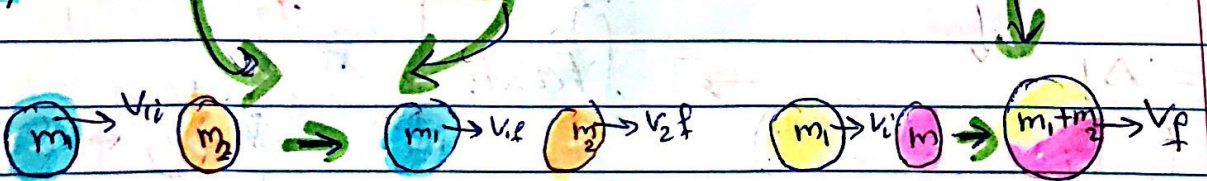

$V_{com_i} = V_{com_f}$

9.7 Elastic collisions in one dimension

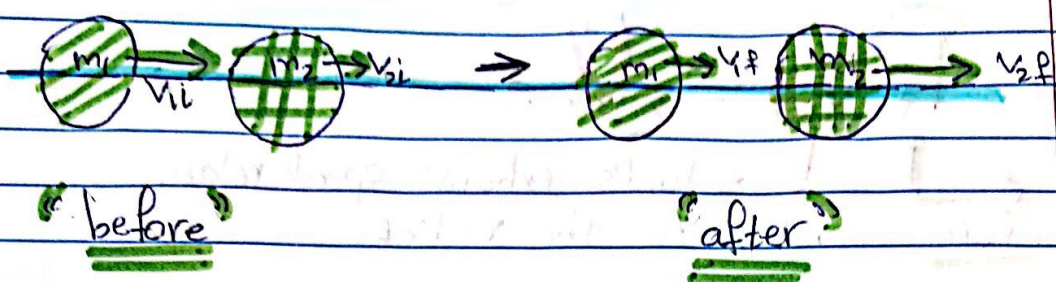

In Elastic collisions the total kinetic energy of the system does not change:

$$\sum K_i = \sum K_f$$


$$\sum \vec{P}_i = \sum \vec{P}_f$$

By solve the two equations:

$$v_{1f} = \frac{m_1 - m_2}{m_1 + m_2} v_{1i}$$

$$v_{2f} = \frac{2m_1}{m_1 + m_2} v_{1i}$$

9.8 Collisions in Two dimension

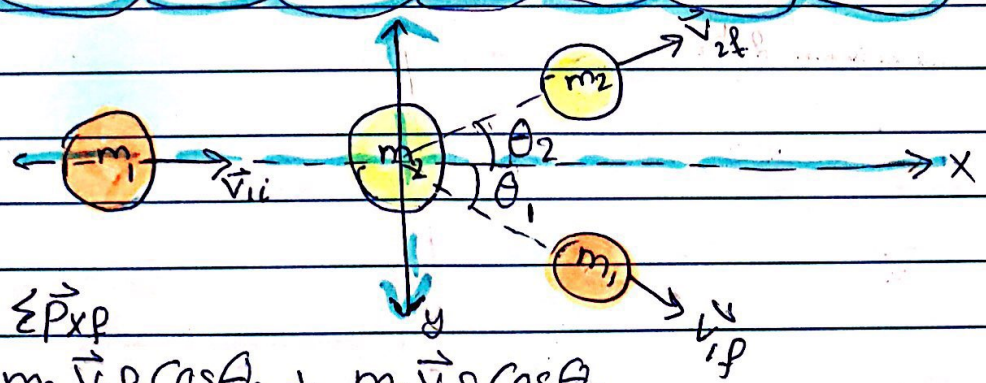

$$\sum \vec{P}_{xi} = \sum \vec{P}_{xf}$$

$$m_1 \vec{v}_{1i} = m_2 \vec{v}_{2f} \cos \theta_2 + m_1 \vec{v}_{1f} \cos \theta_1$$

$$\sum \vec{P}_{yi} = \sum \vec{P}_{yf}$$

$$0 = m_2 \vec{v}_{2f} \sin \theta_2 - m_1 \vec{v}_{1f} \sin \theta_1$$

$$\sum K_i = \sum K_f$$

9.9 Systems with Varying mass

$$\Rightarrow R v_{rel} = M a$$

→ The fuel consumption rate
→ fuel's exhaust speed relative to the rocket
→ rocket's instantaneous mass

$$\Rightarrow v_p - v_i = v_{rel} \ln \frac{m_i}{m_f}$$

Rotation

- angular position $\rightarrow \theta$ "rad"
- angular displacement $\rightarrow \Delta\theta = \theta_2 - \theta_1$
- average angular velocity $\rightarrow \omega_{avg} = \frac{\Delta\theta}{\Delta t}$
- instantaneous angular velocity $\rightarrow \omega_{ins} = \frac{d\theta}{dt}$
- average angular acceleration $\rightarrow \alpha_{avg} = \frac{\Delta\omega}{\Delta t}$
- instantaneous angular acceleration $\rightarrow \alpha_{ins} = \frac{d\omega}{dt}$

1 revolution = 2π radians


* Rotation with constant angular acceleration:

- $\rightarrow \omega = \omega_0 + \alpha t$
- $\rightarrow \theta - \theta_0 = \omega_0 t + \frac{1}{2} \alpha t^2$
- $\rightarrow \omega^2 = \omega_0^2 + 2\alpha (\theta - \theta_0)$
- $\rightarrow \theta - \theta_0 = \frac{1}{2} (\omega_0 + \omega) t$
- $\rightarrow \theta - \theta_0 = \omega t - \frac{1}{2} \alpha t^2$

Easy come: 😊
 "ما يسهل عليه فيزياء"
 "ما يسهل عليه فيزياء"
 $\Delta x \rightarrow \Delta \theta$ ديسايس
 $v \rightarrow \omega$
 $a \rightarrow \alpha$

* relating the linear and angular variables:

- $\rightarrow s = \theta r$
- $\rightarrow v = \omega r$
- $\rightarrow a = \alpha r$
- $\rightarrow a = \omega^2 r$
- $\rightarrow T = \frac{2\pi}{\omega}$, T : period time

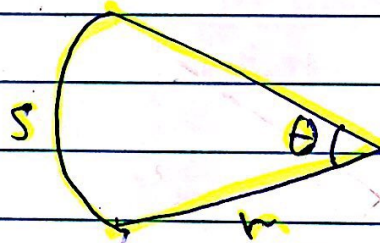

* Kinetic energy of rotation


$$K = \frac{1}{2} I \omega^2$$

I is the rotational inertia of the body defined as:

$I = \sum m_i r_i^2$, for a system of discrete particles and defined as:

$$I = \int r^2 dm = m r^2$$

The parallel-axis theorem:



axis "in the center of mass (com)"

r : the perpendicular distance from the axis of rotation to each mass element in the body

$$I_{com} = \frac{1}{12} M L^2$$

Then when we change the place of rotation



axis of rotation

$$I = I_{com} + M \left(\frac{L}{2}\right)^2$$

SO $I = I_{com} + M h^2$

h : the distance the actual rotation axis has been shifted from the rotation axis through the center of mass.

Note: τ will be given, you can look page [238] Table (10-2)

* Torque ($\vec{\tau}$)

$$\vec{\tau} = \vec{F} \times \vec{r} \quad \text{"cross product."}$$

$$|\tau| = |F| |r| \sin\theta \quad (\text{N.m})$$

We can find the direction of $\vec{\tau}$

By "right-hand rule"

Newton's Second law for rotation:

$$\tau_{\text{net}} = I \alpha$$

Net torque
Inertia
angular acceleration

* Work and rotational Kinetic Energy:

$$\rightarrow W = \int_{\theta_i}^{\theta_f} \tau \cdot d\theta \quad \rightarrow W = \tau (\theta_f - \theta_i)$$

$$\rightarrow W = \Delta K = \frac{1}{2} I \omega_f^2 - \frac{1}{2} I \omega_i^2$$

Power $P = \frac{dW}{dt}$