


Ch 7 Super-position of Quasi-Parallel Plane Waves (1)

- Any Field can be described as a superposition of many plane wave fields. (pulses).

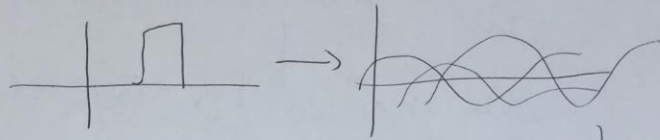

7.1 Intensity of superimposed Plane Waves

- Arbitrary waveforms = \sum plane waves with different \vec{k} , amplitudes, phases, frequencies, polarizations.

$$\vec{E}(\vec{r}, t) = \sum_j \vec{E}_j e^{i(\vec{k}_j \cdot \vec{r} - \omega_j t)}$$

$$\vec{B}(\vec{r}, t) = \sum_j \vec{B}_j e^{i(\vec{k}_j \cdot \vec{r} - \omega_j t)}$$

$$= \sum_j \frac{\vec{k}_j \times \vec{E}_j}{\omega_j} e^{i(\vec{k}_j \cdot \vec{r} - \omega_j t)}$$

$$\vec{S}(\vec{r}, t) = \text{Re} \left\{ \vec{E}(\vec{r}, t) \right\} \times \text{Re} \left\{ \vec{B}(\vec{r}, t) \right\} \quad (2)$$

$$= \sum_{j,m} \frac{1}{\omega_m \mu_0} \text{Re} \left\{ \vec{E}_j e^{i(\vec{k}_j \cdot \vec{r} - \omega_j t)} \right\} \times \text{Re} \left\{ \vec{k}_m \times \vec{E}_m e^{i(\vec{k}_m \cdot \vec{r} - \omega_m t)} \right\} \quad (7.3)$$

(cross) ←

[Notice j, m for two series terms].

Simplifying Assumptions to begin with:

- A1 1) Time-Average \vec{S} to remove fluctuations that change on scale of optical frequencies. ... Why
- A2 2) Assume all plane waves travel \approx parallel to each other.
- A3 3) let \vec{k}_m be real.

Use $\vec{A} \times (\vec{B} \times \vec{C}) = \vec{B}(\vec{A} \cdot \vec{C}) - \vec{C}(\vec{A} \cdot \vec{B})$ (3)

on (7.3)

$$\vec{A} = \text{Re} \left\{ \vec{E}_j e^{i(\vec{k}_j \cdot \vec{r} - \omega_j t)} \right\}$$

$$\vec{B} = \vec{k}_m \quad ; \quad \vec{C} = \text{Re} \left\{ \vec{E}_m e^{i(\vec{k}_m \cdot \vec{r} - \omega_m t)} \right\}$$

$$\therefore \vec{S}(\vec{r}, t) = \sum_{j,m} \frac{1}{\omega_m \mu_0} \left[\vec{k}_m (\text{Re} \left\{ \vec{E}_j e^{i(\vec{k}_j \cdot \vec{r} - \omega_j t)} \right\}) \cdot \right.$$

$$\left. \text{Re} \left\{ \vec{E}_m e^{i(\vec{k}_m \cdot \vec{r} - \omega_m t)} \right\} \right]$$

$$- \text{Re} \left\{ \vec{E}_m e^{i(\vec{k}_m \cdot \vec{r} - \omega_m t)} \right\} (\text{Re} \left\{ \vec{E}_j e^{i(\vec{k}_j \cdot \vec{r} - \omega_j t)} \right\} \cdot \vec{k}_m)$$

Using A2: Last term $\rightarrow 0$ because


$$\vec{k}_m \perp \vec{E}_j$$

$$\vec{S}(\vec{r}, t) = \sum_{j,m} \frac{k_m}{\omega_m \mu_0} \left\{ \vec{E}_j e^{i(\vec{k}_j \cdot \vec{r} - \omega_j t)} + \vec{E}_j^* e^{-i(\vec{k}_j \cdot \vec{r} - \omega_j t)} \right\}$$

$$\cdot \left\{ \frac{\vec{E}_m e^{i(\vec{k}_m \cdot \vec{r} - \omega_m t)} + \vec{E}_m^* e^{-i(\vec{k}_m \cdot \vec{r} - \omega_m t)}}{2} \right\}$$

$$\vec{S}(\vec{r}, t) = \sum_{j,m} \frac{k_m}{4W_m \mu_0} \left\{ \begin{aligned} & \vec{E}_j \cdot \vec{E}_m e^{i[(\vec{k}_j + \vec{k}_m) \cdot \vec{r} - (\omega_j + \omega_m)t]} \\ & + \vec{E}_j \cdot \vec{E}_m e^{-i[(\vec{k}_j + \vec{k}_m) \cdot \vec{r} - (\omega_j + \omega_m)t]} \\ & + \vec{E}_j \cdot \vec{E}_m e^{i[(\vec{k}_j - \vec{k}_m) \cdot \vec{r} - (\omega_j - \omega_m)t]} \\ & + \vec{E}_j \cdot \vec{E}_m e^{-i[(\vec{k}_j - \vec{k}_m) \cdot \vec{r} - (\omega_j - \omega_m)t]} \end{aligned} \right\} \quad (4)$$

Using A1: all $(\omega_j + \omega_m)t$ terms oscillate quickly and time-average to zero.



We keep $(\omega_j - \omega_m)t$. It oscillates slowly. Why??

Assume $n \approx \text{constant}$.

$$\therefore k_m / W_m \mu_0 \approx n \epsilon_0 c$$

$$\langle \vec{S}(\vec{r}, t) \rangle_{osc} = \frac{n \epsilon_0 c}{2} \sum_{j, m} \vec{E}_j \cdot \vec{E}_m^* e^{i[(\vec{k}_j - \vec{k}_m) \cdot \vec{r} - (\omega_j - \omega_m)t]} + \frac{\vec{E}_j \cdot \vec{E}_m e^{-i[(\vec{k}_j - \vec{k}_m) \cdot \vec{r} - (\omega_j - \omega_m)t]}}{2}$$

$$= \frac{n \epsilon_0 c}{2} \operatorname{Re} \left\{ \sum_j \vec{E}_j e^{i(\vec{k}_j \cdot \vec{r} - \omega_j t)} \sum_m \vec{E}_m^* e^{-i(\vec{k}_m \cdot \vec{r} - \omega_m t)} \right\}$$

$$= \frac{n \epsilon_0 c}{2} \operatorname{Re} \left\{ \vec{E}(\vec{r}, t) \cdot \vec{E}^*(\vec{r}, t) \right\}$$

$$\therefore \underline{I}(\vec{r}, t) = \frac{n \epsilon_0 c}{2} \vec{E}(\vec{r}, t) \cdot \vec{E}^*(\vec{r}, t)$$

Parallel or nearly parallel
 \vec{k}_j

7.2 Group vs. Phase Velocity: (6)
Sum of two plane waves

$$\vec{E}_1 = E_0 e^{i(\vec{k}_1 \cdot \vec{r} - \omega_1 t)} \quad \vec{E}_2 = E_0 e^{i(\vec{k}_2 \cdot \vec{r} - \omega_2 t)}$$

Equal Amplitudes.

phase velocities: $v_1 = \frac{\omega_1}{k_1}$; $v_2 = \frac{\omega_2}{k_2}$

$$\vec{E}(\vec{r}, t) = E_0 e^{i(\vec{k}_1 \cdot \vec{r} - \omega_1 t)} + E_0 e^{i(\vec{k}_2 \cdot \vec{r} - \omega_2 t)}$$

↓
 interference occurs.
 constructive + destructive.

$$\begin{aligned} I(\vec{r}, t) &= n \epsilon_0 c \vec{E}(\vec{r}, t) \cdot \vec{E}^*(\vec{r}, t) \\ &= \frac{n \epsilon_0 c}{2} \left[\vec{E}_0 e^{i(\vec{k}_1 \cdot \vec{r} - \omega_1 t)} + \vec{E}_0 e^{i(\vec{k}_2 \cdot \vec{r} - \omega_2 t)} \right] \\ &\quad \cdot \left[\vec{E}_0 e^{-i(\vec{k}_1 \cdot \vec{r} - \omega_1 t)} + \vec{E}_0 e^{-i(\vec{k}_2 \cdot \vec{r} - \omega_2 t)} \right] \end{aligned}$$

$$= \frac{n \epsilon_0 c}{2} \left[\vec{E}_0 \cdot \vec{E}_0^* + \vec{E}_0 \cdot \vec{E}_0^* e^{i(\vec{k}_1 \cdot \vec{r} - \omega_1 t) - i(\vec{k}_2 \cdot \vec{r} - \omega_2 t)} \right. \\ \left. + \vec{E}_0 \cdot \vec{E}_0^* e^{i(\vec{k}_2 \cdot \vec{r} - \omega_2 t) - i(\vec{k}_1 \cdot \vec{r} - \omega_1 t)} \right. \\ \left. + \vec{E}_0 \cdot \vec{E}_0^* \right]$$

$$= \frac{n \epsilon_0 c}{2} \vec{E}_0 \cdot \vec{E}_0^* \left[2 + e^{i[(\vec{k}_2 - \vec{k}_1) \cdot \vec{r} - (\omega_2 - \omega_1)t]} \right. \\ \left. + e^{-i[(\vec{k}_2 - \vec{k}_1) \cdot \vec{r} - (\omega_2 - \omega_1)t]} \right]$$


$$= n \epsilon_0 c \vec{E}_0 \cdot \vec{E}_0^* \left[1 + \cos[(\vec{k}_2 - \vec{k}_1) \cdot \vec{r} - (\omega_2 - \omega_1)t] \right]$$

$$= n \epsilon_0 c \vec{E}_0 \cdot \vec{E}_0^* \left[1 + \cos(\Delta \vec{k} \cdot \vec{r} - \Delta \omega t) \right]$$

$$\Delta \vec{k} \equiv \vec{k}_2 - \vec{k}_1$$

$$\Delta \omega \equiv \omega_2 - \omega_1$$

8

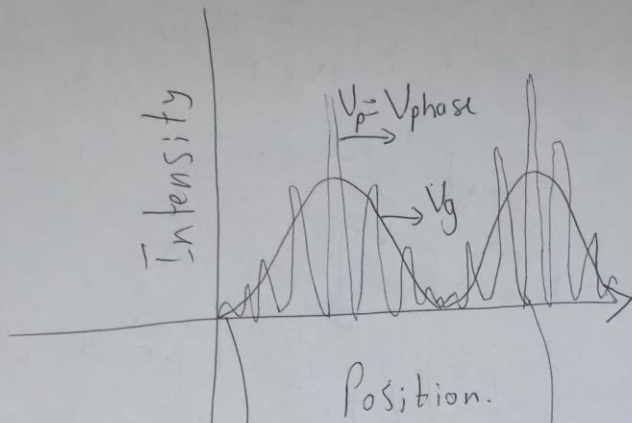

averaged
over rapid
oscillations.

keeping
rapid oscillations.

$$V_p = \frac{\bar{w}}{k}$$

↓
Phase Velocity

$$V_g \equiv \frac{\Delta w}{\Delta k} \approx \left. \frac{dw}{dk} \right|_{\bar{w}}$$

↓
group velocity.
(envelope velocity).

P 7.3 HW

Example 7.1

(9)

$$n_{\text{plasma}}(\omega) = \sqrt{1 - \omega_p^2/\omega^2} \quad (< 1) \text{ (let } \omega > \omega_p)$$

Find V_p, V_g for superposition of two plane waves in a plasma.

$$V_p = \frac{\bar{\omega}}{\bar{k}} = \frac{\omega_1 + \omega_2/2}{k_1 + k_2/2}$$
$$= \frac{\omega_1 + \omega_2}{\frac{n_p(\omega_1)\omega_1}{c} + \frac{n_p(\omega_2)\omega_2}{c}}$$


if $\omega_1 \approx \omega_2 \rightarrow n_p(\omega_1) \approx n_p(\omega_2)$

$$V_p = \frac{c}{n_p(\omega)} \quad ?? \quad \boxed{V_p > c}$$

$$V_g = \frac{\Delta\omega}{\Delta k} \approx \frac{d\omega}{dk} = \left[\frac{dk}{d\omega} \right]^{-1} = \left[\frac{d}{d\omega} \frac{\omega n_p(\omega)}{c} \right]^{-1}$$
$$= \left[\frac{d}{d\omega} \frac{\omega \sqrt{1 - \omega_p^2/\omega^2}}{c} \right]^{-1} = n_p(\omega) c$$

$\rightarrow \left(1 - \frac{\omega_p^2}{\omega^2} + \frac{\omega_p^2}{\omega^2} \right) \sqrt{1 - \frac{\omega_p^2}{\omega^2}}$

7.3 Frequency Spectrum of Light (10)

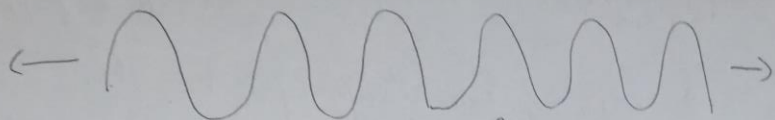

Plane wave with one frequency ω has infinite length and infinite duration.

A waveform that does not repeat, like a pulse is given by:

$$\vec{E}(\vec{r}, t) = \frac{1}{\sqrt{2\pi}} \int_{-\infty}^{\infty} \vec{E}(\vec{r}, \omega) e^{-i\omega t} d\omega$$

spectrum

↓
gives amplitude and phase of each plane wave component in the waveform.