

Chapter 7 Single-Dimensional Arrays



Opening Problem

Read one hundred numbers, compute their average, and find out how many numbers are above the average.



Objectives


- ☞ To describe why arrays are necessary in programming (§7.1).
- ☞ To declare array reference variables and create arrays (§§7.2.1–7.2.2).
- ☞ To obtain array size using **arrayRefVar.length** and know default values in an array (§7.2.3).
- ☞ To access array elements using indexes (§7.2.4).
- ☞ To declare, create, and initialize an array using an array initializer (§7.2.5).
- ☞ To program common array operations (displaying arrays, summing all elements, finding the minimum and maximum elements, random shuffling, and shifting elements) (§7.2.6).
- ☞ To simplify programming using the foreach loops (§7.2.7).
- ☞ To apply arrays in application development (**AnalyzeNumbers**, **DeckOfCards**) (§§7.3–7.4).
- ☞ To copy contents from one array to another (§7.5).
- ☞ To develop and invoke methods with array arguments and return values (§§7.6–7.8).
- ☞ To define a method with a variable-length argument list (§7.9).
- ☞ To search elements using the linear (§7.10.1) or binary (§7.10.2) search algorithm.
- ☞ To sort an array using the selection sort approach (§7.11).
- ☞ To use the methods in the **java.util.Arrays** class (§7.12).
- ☞ To pass arguments to the main method from the command line (§7.13).



Introducing Arrays

Array is a data structure that represents a collection of the same types of data.

```
double[] myList = new double[10];
```

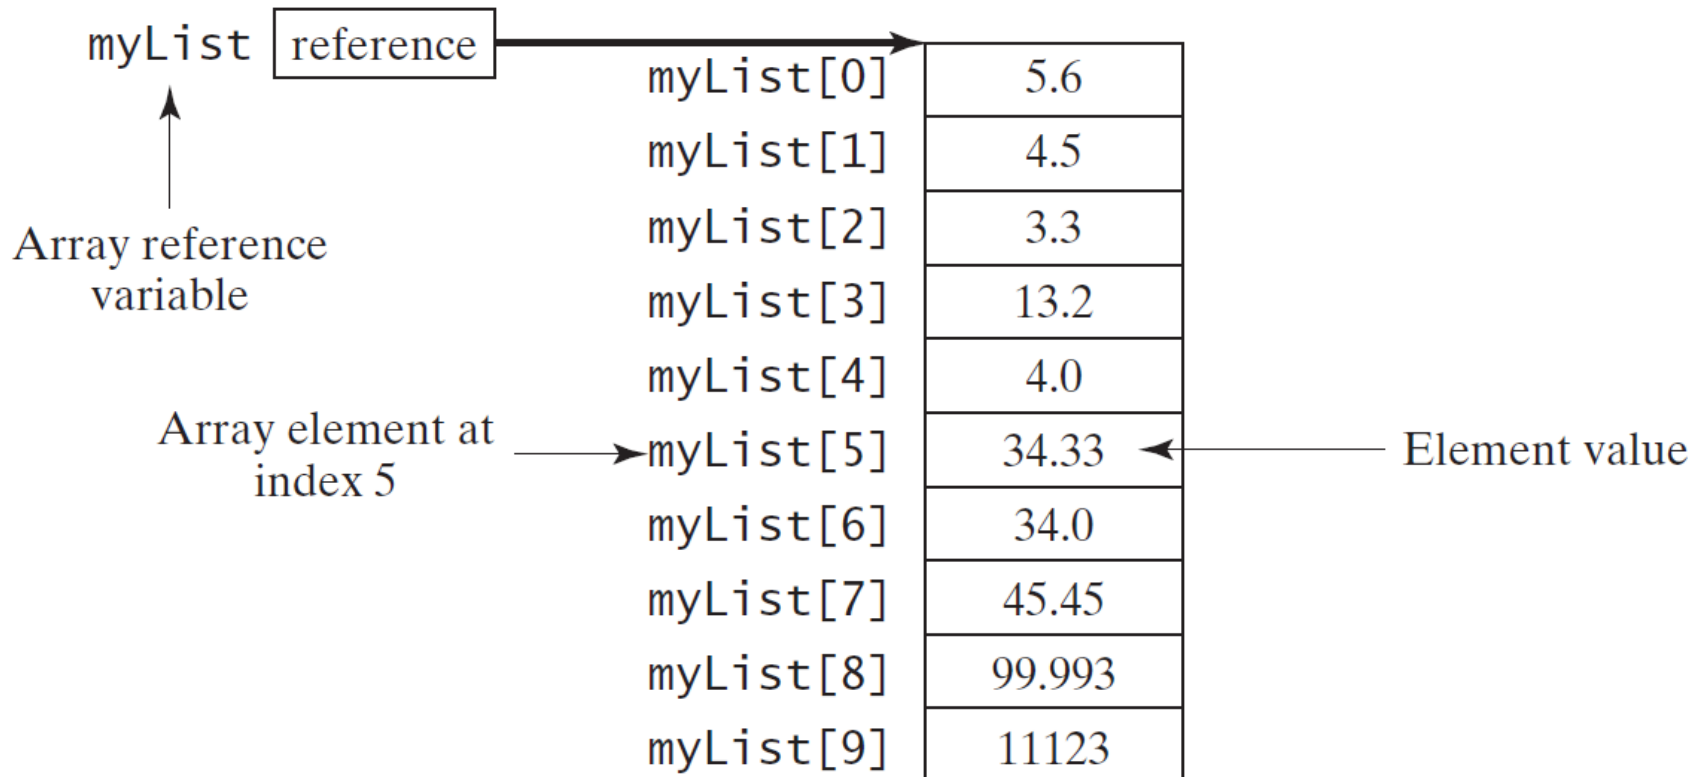

Declaring Array Variables

☞ `datatype[] arrayRefVar;`

Example:

```
double[] myList;
```

☞ `datatype arrayRefVar[];` // This style is allowed, but not preferred

Example:

```
double myList[];
```



Creating Arrays

```
arrayRefVar = new datatype[arraySize];
```

Example:

```
myList = new double[10];
```

`myList[0]` references the first element in the array.

`myList[9]` references the last element in the array.



Declaring and Creating in One Step

☞ `datatype[] arrayRefVar = new
datatype[arraySize];`

`double[] myList = new double[10];`

☞ `datatype arrayRefVar[] = new
datatype[arraySize];`

`double myList[] = new double[10];`



The Length of an Array

Once an array is created, its size is fixed. It cannot be changed. You can find its size using

```
arrayRefVar.length
```

For example,

```
myList.length returns 10
```



Default Values

When an array is created, its elements are assigned the default value of

0 for the numeric primitive data types,
'\u0000' for char types, and
false for boolean types.



Indexed Variables

The array elements are accessed through the index. The array indices are *0-based*, i.e., it starts from 0 to `arrayRefVar.length-1`. In the example in Figure 6.1, `myList` holds ten double values and the indices are from 0 to 9.

Each element in the array is represented using the following syntax, known as an *indexed variable*:

```
arrayRefVar[index];
```



Using Indexed Variables

After an array is created, an indexed variable can be used in the same way as a regular variable. For example, the following code adds the value in `myList[0]` and `myList[1]` to `myList[2]`.

```
myList[2] = myList[0] + myList[1];
```



Array Initializers

☞ Declaring, creating, initializing in one step:

```
double[] myList = {1.9, 2.9, 3.4, 3.5};
```

This shorthand syntax must be in one statement.



Declaring, creating, initializing Using the Shorthand Notation

```
double[] myList = {1.9, 2.9, 3.4, 3.5};
```

This shorthand notation is equivalent to the following statements:

```
double[] myList = new double[4];
```

```
myList[0] = 1.9;
```

```
myList[1] = 2.9;
```

```
myList[2] = 3.4;
```

```
myList[3] = 3.5;
```



CAUTION

Using the shorthand notation, you have to declare, create, and initialize the array all in one statement.

Splitting it would cause a syntax error. For example, the following is wrong:

```
double[] myList;
```

```
myList = {1.9, 2.9, 3.4, 3.5};
```



Trace Program with Arrays

Declare array variable values, create an array, and assign its reference to values

```
public class Test {  
    public static void main(String[] args) {  
        int[] values = new int[5];  
        for (int i = 1; i < 5; i++) {  
            values[i] = i + values[i-1];  
        }  
        values[0] = values[1] + values[4];  
    }  
}
```

After the array is created

0	0
1	0
2	0
3	0
4	0

Trace Program with Arrays

i becomes 1

```
public class Test {  
    public static void main(String[] args) {  
        int[] values = new int[5];  
        for (int i = 1; i < 5; i++) {  
            values[i] = i + values[i-1];  
        }  
        values[0] = values[1] + values[4];  
    }  
}
```

After the array is created

0	0
1	0
2	0
3	0
4	0



Trace Program with Arrays

i (=1) is less than 5

```
public class Test {  
    public static void main(String[] args) {  
        int[] values = new int[5];  
        for (int i = 1; i < 5; i++) {  
            values[i] = i + values[i-1];  
        }  
        values[0] = values[1] + values[4];  
    }  
}
```

After the array is created

0	0
1	0
2	0
3	0
4	0



Trace Program with Arrays

After this line is executed, value[1] is 1

```
public class Test {  
    public static void main(String[] args) {  
        int[] values = new int[5];  
        for (int i = 1; i < 5; i++) {  
            values[i] = i + values[i-1];  
        }  
        values[0] = values[1] + values[4];  
    }  
}
```

After the first iteration

0	0
1	1
2	0
3	0
4	0

Trace Program with Arrays

After `i++`, `i` becomes 2

```
public class Test {  
    public static void main(String[] args) {  
        int[] values = new int[5];  
        for (int i = 1; i < 5; i++) {  
            values[i] = i + values[i-1];  
        }  
        values[0] = values[1] + values[4];  
    }  
}
```

After the first iteration

0	0
1	1
2	0
3	0
4	0



Trace Program with Arrays

```
public class Test {  
    public static void main(String[]  
        args) {  
        int[] values = new int[5];  
        for (int i = 1; i < 5; i++) {  
            values[i] = i + values[i-1];  
        }  
        values[0] = values[1] +  
            values[4];  
    }  
}
```

i (= 2) is less than 5

After the first iteration

0	0
1	1
2	0
3	0
4	0



Trace Program with Arrays

After this line is executed,
values[2] is 3 (2 + 1)

```
public class Test {  
    public static void main(String[] args) {  
        int[] values = new int[5];  
        for (int i = 1; i < 5; i++) {  
            values[i] = i + values[i-1];  
        }  
        values[0] = values[1] + values[4];  
    }  
}
```

After the second iteration

0	0
1	1
2	3
3	0
4	0

Trace Program with Arrays

After this, i becomes 3.

```
public class Test {  
    public static void main(String[] args) {  
        int[] values = new int[5];  
        for (int i = 1; i < 5; i++) {  
            values[i] = i + values[i-1];  
        }  
        values[0] = values[1] + values[4];  
    }  
}
```

After the second iteration

0	0
1	1
2	3
3	0
4	0



Trace Program with Arrays

i (=3) is still less than 5.

```
public class Test {  
    public static void main(String[] args) {  
        int[] values = new int[5];  
        for (int i = 1; i < 5; i++) {  
            values[i] = i + values[i-1];  
        }  
        values[0] = values[1] + values[4];  
    }  
}
```

After the second iteration

0	0
1	1
2	3
3	0
4	0



Trace Program with Arrays

After this line, values[3] becomes 6 (3 + 3)

```
public class Test {  
    public static void main(String[] args) {  
        int[] values = new int[5];  
        for (int i = 1; i < 5; i++) {  
            values[i] = i + values[i-1];  
        }  
        values[0] = values[1] + values[4];  
    }  
}
```

After the third iteration

0	0
1	1
2	3
3	6
4	0

Trace Program with Arrays

After this, i becomes 4

```
public class Test {  
    public static void main(String[] args) {  
        int[] values = new int[5];  
        for (int i = 1; i < 5; i++) {  
            values[i] = i + values[i-1];  
        }  
        values[0] = values[1] + values[4];  
    }  
}
```

After the third iteration

0	0
1	1
2	3
3	6
4	0

Trace Program with Arrays

i (=4) is still less than 5

```
public class Test {  
    public static void main(String[] args) {  
        int[] values = new int[5];  
        for (int i = 1; i < 5; i++) {  
            values[i] = i + values[i-1];  
        }  
        values[0] = values[1] + values[4];  
    }  
}
```

After the third iteration

0	0
1	1
2	3
3	6
4	0



Trace Program with Arrays

After this, values[4] becomes 10 (4 + 6)

```
public class Test {  
    public static void main(String[] args) {  
        int[] values = new int[5];  
        for (int i = 1; i < 5; i++) {  
            values[i] = i + values[i-1];  
        }  
        values[0] = values[1] + values[4];  
    }  
}
```

After the fourth iteration

0	0
1	1
2	3
3	6
4	10

Trace Program with Arrays

After `i++`, `i` becomes 5

```
public class Test {  
    public static void main(String[] args) {  
        int[] values = new int[5];  
        for (int i = 1; i < 5; i++) {  
            values[i] = i + values[i-1];  
        }  
        values[0] = values[1] + values[4];  
    }  
}
```

After the fourth iteration

0	0
1	1
2	3
3	6
4	10



Trace Program with Arrays

$i (=5) < 5$ is false. Exit the loop

```
public class Test {  
    public static void main(String[] args) {  
        int[] values = new int[5];  
        for (int i = 1; i < 5; i++) {  
            values[i] = i + values[i-1];  
        }  
        values[0] = values[1] + values[4];  
    }  
}
```

After the fourth iteration


0	0
1	1
2	3
3	6
4	10



Trace Program with Arrays

After this line, values[0] is 11 (1 + 10)

```
public class Test {  
    public static void main(String[] args) {  
        int[] values = new int[5];  
        for (int i = 1; i < values.length; i++) {  
            values[i] = i * values[i-1];  
        }  
        values[0] = values[1] + values[4];  
    }  
}
```

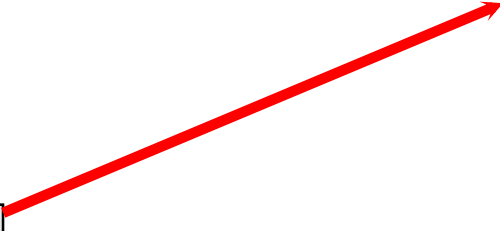

0	11
1	1
2	3
3	6
4	10



Processing Arrays

See the examples in the text.

1. (Initializing arrays with input values)
2. (Initializing arrays with random values)
3. (Printing arrays)
4. (Summing all elements)
5. (Finding the largest element)
6. (Finding the smallest index of the largest element)
7. (*Random shuffling*)
8. (*Shifting elements*)



Initializing arrays with input values

```
java.util.Scanner input = new java.util.Scanner(System.in);  
System.out.print("Enter " + myList.length + " values: ");  
for (int i = 0; i < myList.length; i++)  
    myList[i] = input.nextDouble();
```



Initializing arrays with random values

```
for (int i = 0; i < myList.length; i++) {  
    myList[i] = Math.random() * 100;  
}
```



Printing arrays

```
for (int i = 0; i < myList.length; i++) {  
    System.out.print(myList[i] + " ");  
}
```



Summing all elements

```
double total = 0;  
for (int i = 0; i < myList.length; i++) {  
    total += myList[i];  
}
```




Finding the largest element

```
double max = myList[0];  
for (int i = 1; i < myList.length; i++) {  
    if (myList[i] > max) max = myList[i];  
}
```



Random shuffling

```
for (int i = 0; i < myList.length - 1; i++) {  
    // Generate an index j randomly  
    int j = (int) (Math.random()  
        * myList.length);  
  
    // Swap myList[i] with myList[j]  
    double temp = myList[i];  
    myList[i] = myList[j];  
    myList[j] = temp;  
}
```

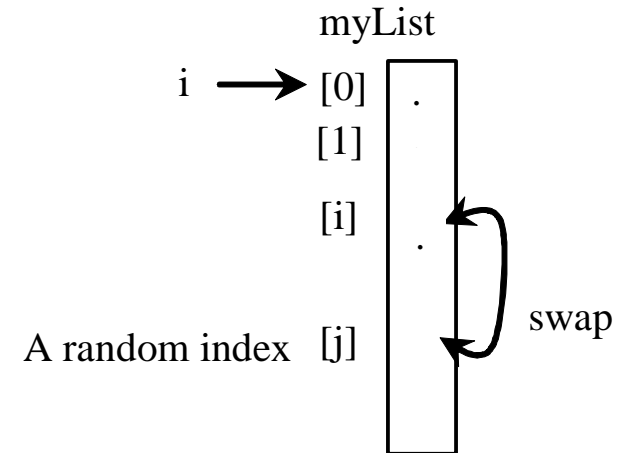


Shifting Elements

```
double temp = myList[0]; // Retain the first element
```

```
// Shift elements left  
for (int i = 1; i < myList.length; i++) {  
    myList[i - 1] = myList[i];  
}
```

```
// Move the first element to fill in the last position  
myList[myList.length - 1] = temp;
```

myList



Enhanced for Loop (for-each loop)

JDK 1.5 introduced a new for loop that enables you to traverse the complete array sequentially without using an index variable. For example, the following code displays all elements in the array myList:

```
for (double value: myList)
    System.out.println(value);
```

In general, the syntax is

```
for (elementType value: arrayRefVar) {
    // Process the value
}
```



You still have to use an index variable if you wish to traverse the array in a different order or change the elements in the array.



Copying Arrays

Often, in a program, you need to duplicate an array or a part of an array. In such cases you could attempt to use the assignment statement (=), as follows:

```
list2 = list1;
```

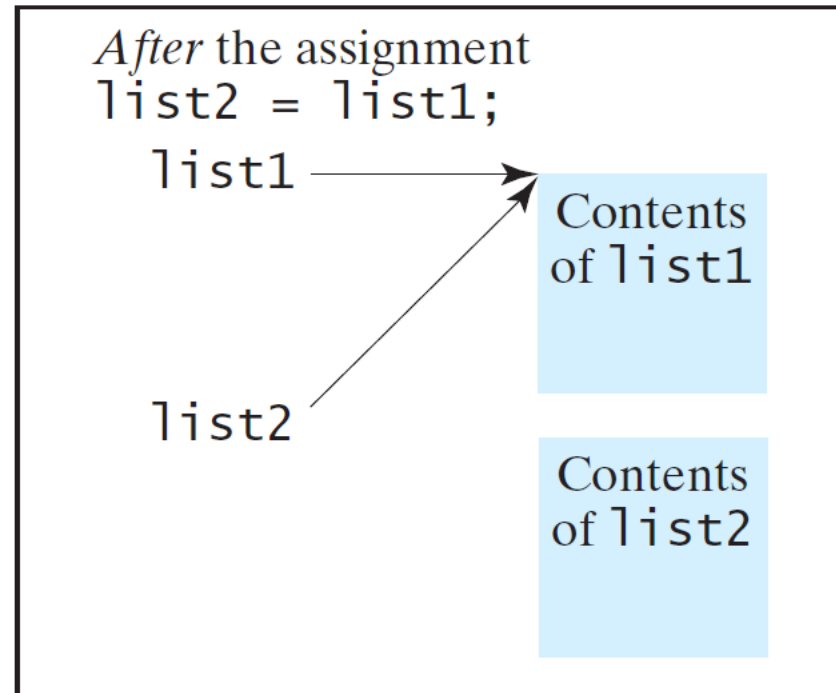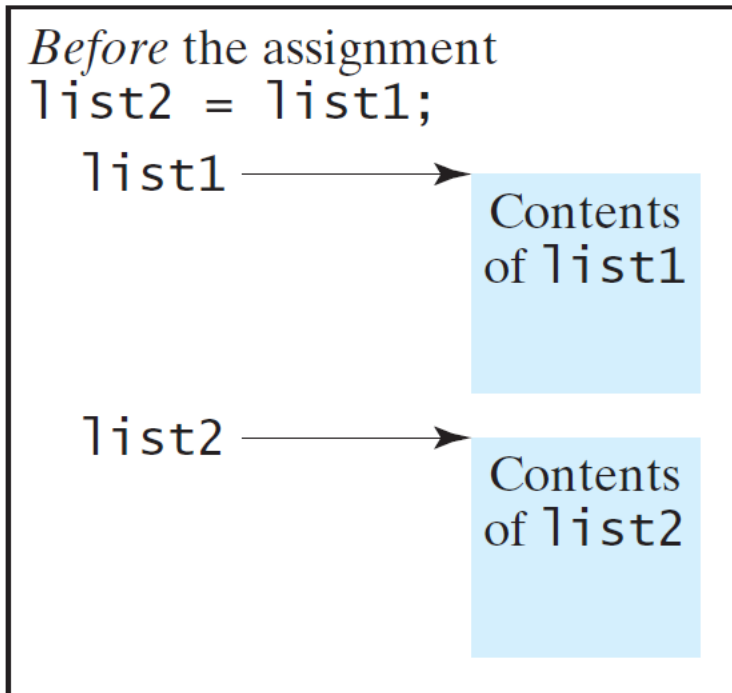

Copying Arrays

Using a loop:

```
int[] sourceArray = {2, 3, 1, 5, 10};  
int[] targetArray = new  
    int[sourceArray.length];  
  
for (int i = 0; i < sourceArray.length; i++)  
    targetArray[i] = sourceArray[i];
```



The `arraycopy` Utility

```
arraycopy (sourceArray, src_pos,  
           targetArray, tar_pos, length);
```

Example:

```
System.arraycopy (sourceArray, 0,  
                  targetArray, 0, sourceArray.length);
```



Passing Arrays to Methods

```
public static void printArray(int[] array) {  
    for (int i = 0; i < array.length; i++) {  
        System.out.print(array[i] + " ");  
    }  
}
```

Invoke the method

```
int[] list = {3, 1, 2, 6, 4, 2};  
printArray(list);
```

Invoke the method

```
printArray(new int[]{3, 1, 2, 6, 4, 2});
```

Anonymous array



Anonymous Array

The statement

```
printArray(new int[]{3, 1, 2, 6, 4, 2});
```

creates an array using the following syntax:

```
new dataType[]{literal0, literal1, ..., literalk};
```

There is no explicit reference variable for the array. Such array is called an *anonymous array*.



Pass By Value


Java uses *pass by value* to pass arguments to a method. There are important differences between passing a value of variables of primitive data types and passing arrays.

☞ For a parameter of a primitive type value, the actual value is passed. Changing the value of the local parameter inside the method does not affect the value of the variable outside the method.


☞ For a parameter of an array type, the value of the parameter contains a reference to an array; this reference is passed to the method. Any changes to the array that occur inside the method body will affect the original array that was passed as the argument.

Simple Example

```
public class Test {  
    public static void main(String[] args) {  
        int x = 1; // x represents an int value  
        int[] y = new int[10]; // y represents an array of int values  
  
        m(x, y); // Invoke m with arguments x and y  
  
        System.out.println("x is " + x);  
        System.out.println("y[0] is " + y[0]);  
    }  
  
    public static void m(int number, int[] numbers) {  
        number = 1001; // Assign a new value to number  
        numbers[0] = 5555; // Assign a new value to numbers[0]  
    }  
}
```




Call Stack

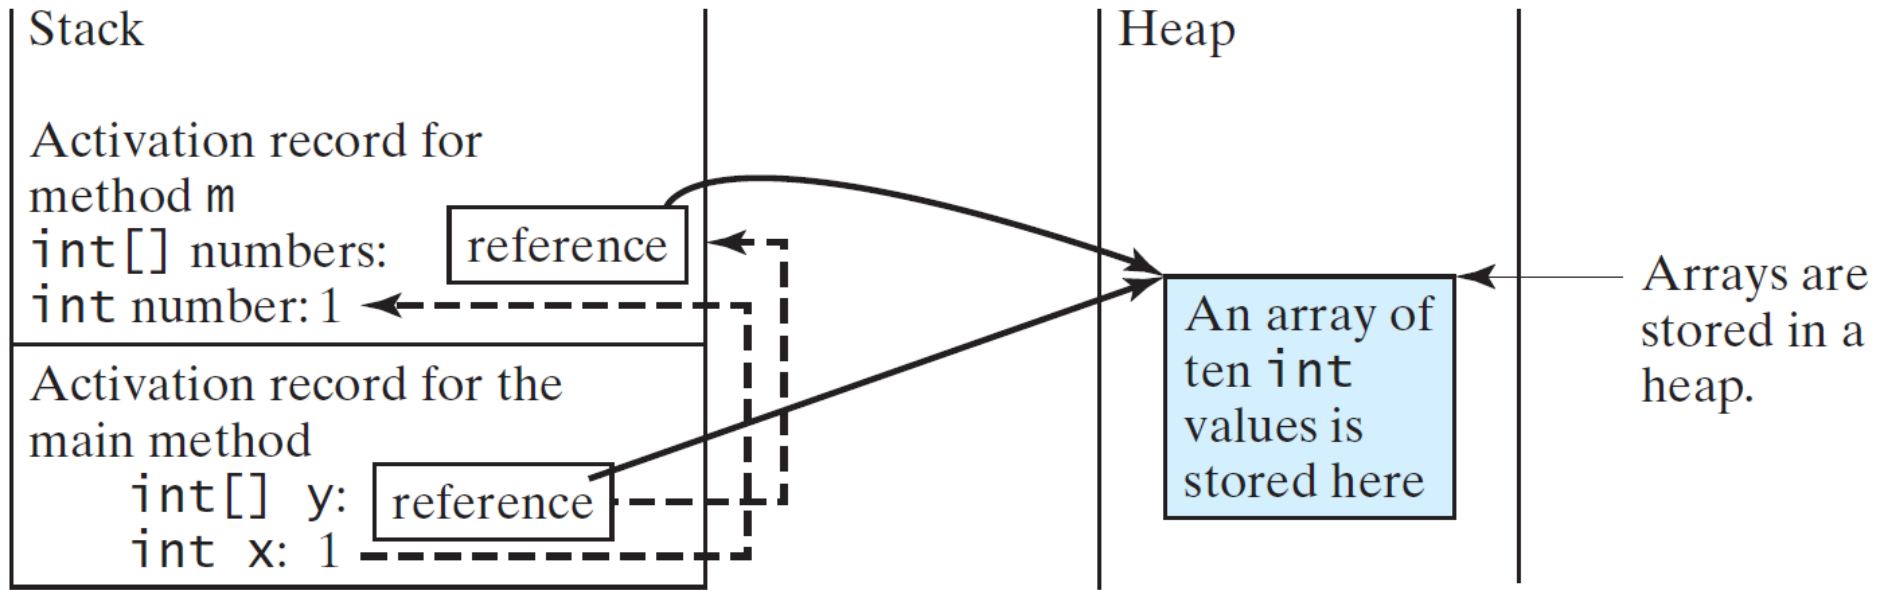


When invoking `m(x, y)`, the values of `x` and `y` are passed to `number` and `numbers`. Since `y` contains the reference value to the array, `numbers` now contains the same reference value to the same array.

Call Stack

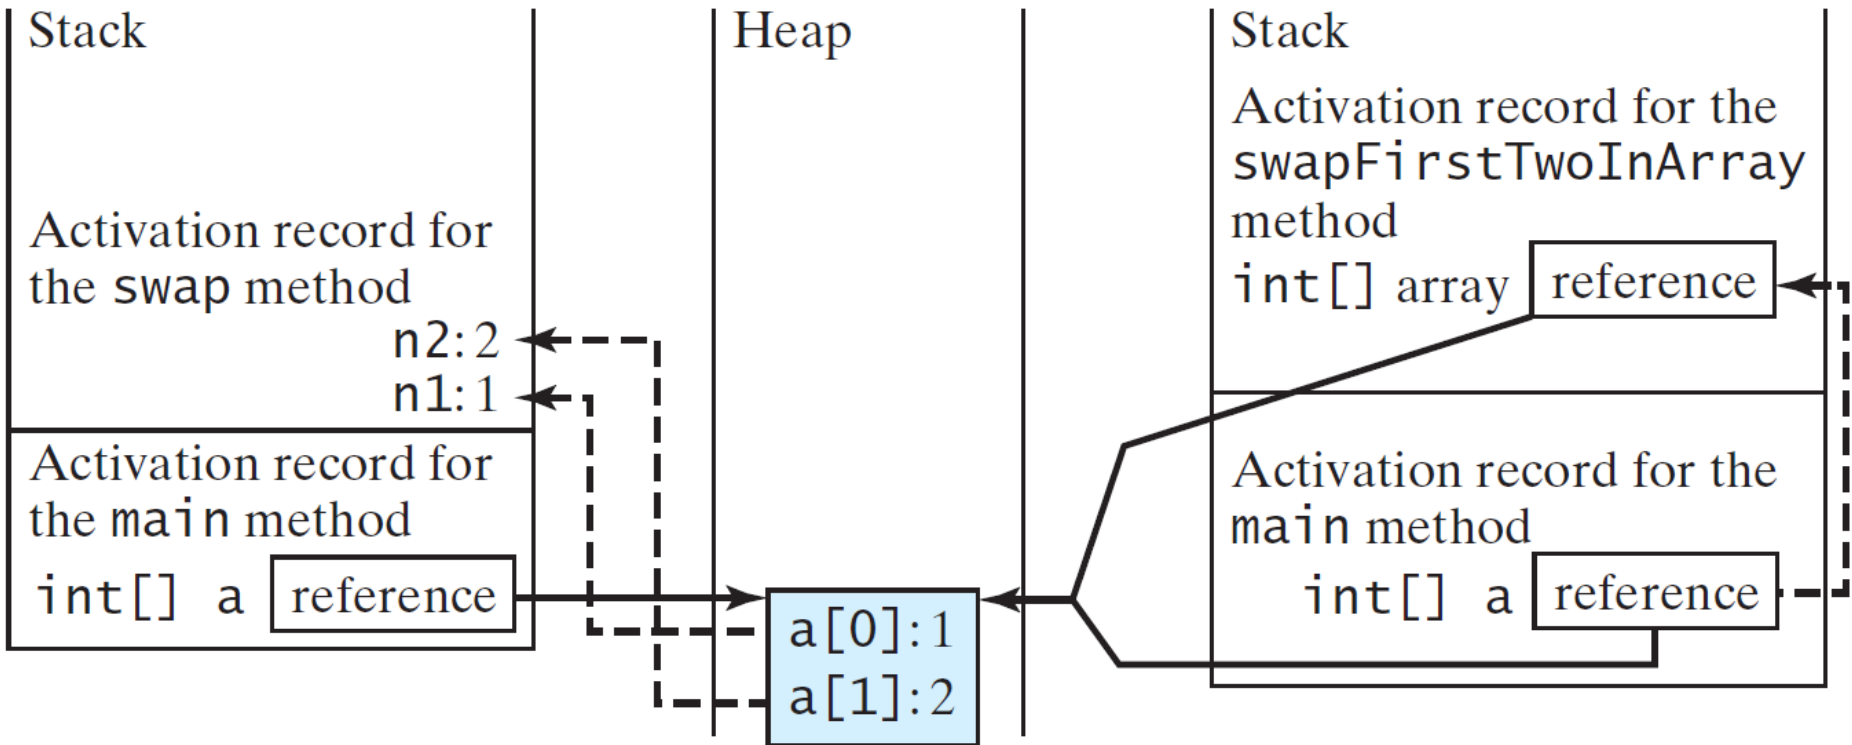

When invoking `m(x, y)`, the values of `x` and `y` are passed to number and numbers. Since `y` contains the reference value to the array, numbers now contains the same reference value to the same array.

Heap

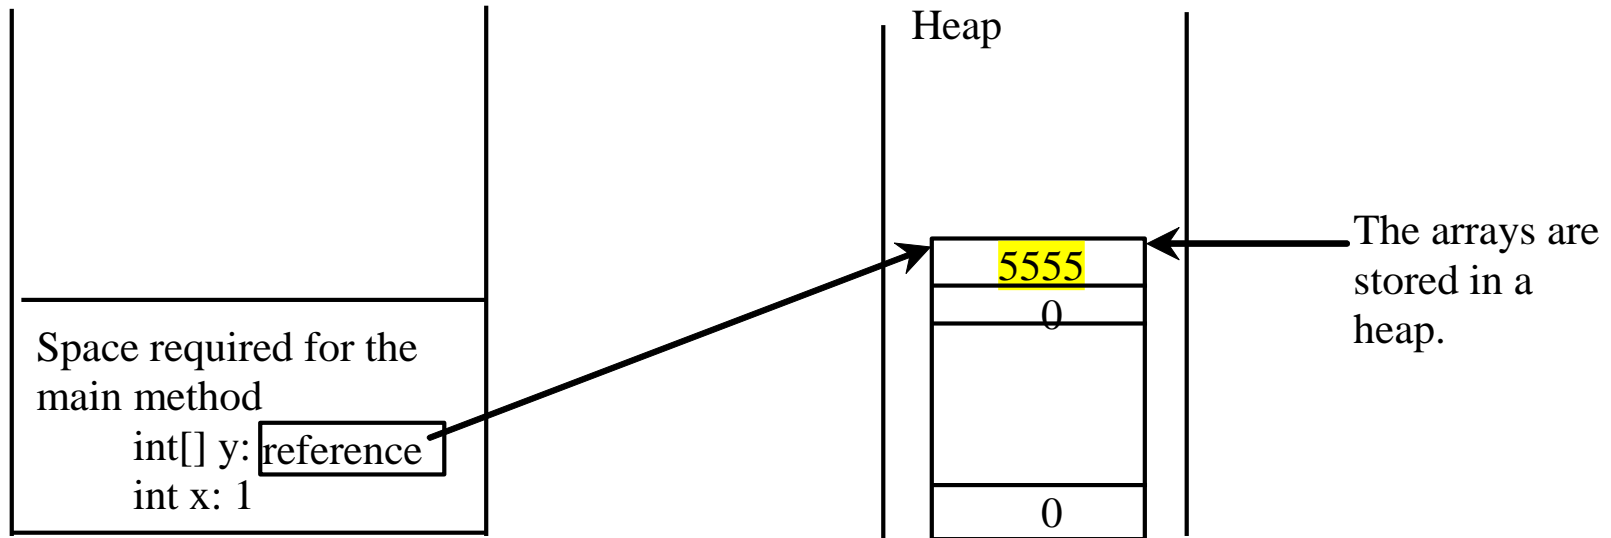


The JVM stores the array in an area of memory, called *heap*, which is used for dynamic memory allocation where blocks of memory are allocated and freed in an arbitrary order.

Passing Arrays as Arguments

- ➔ Objective: Demonstrate differences of passing primitive data type variables and array variables.



Example, cont.

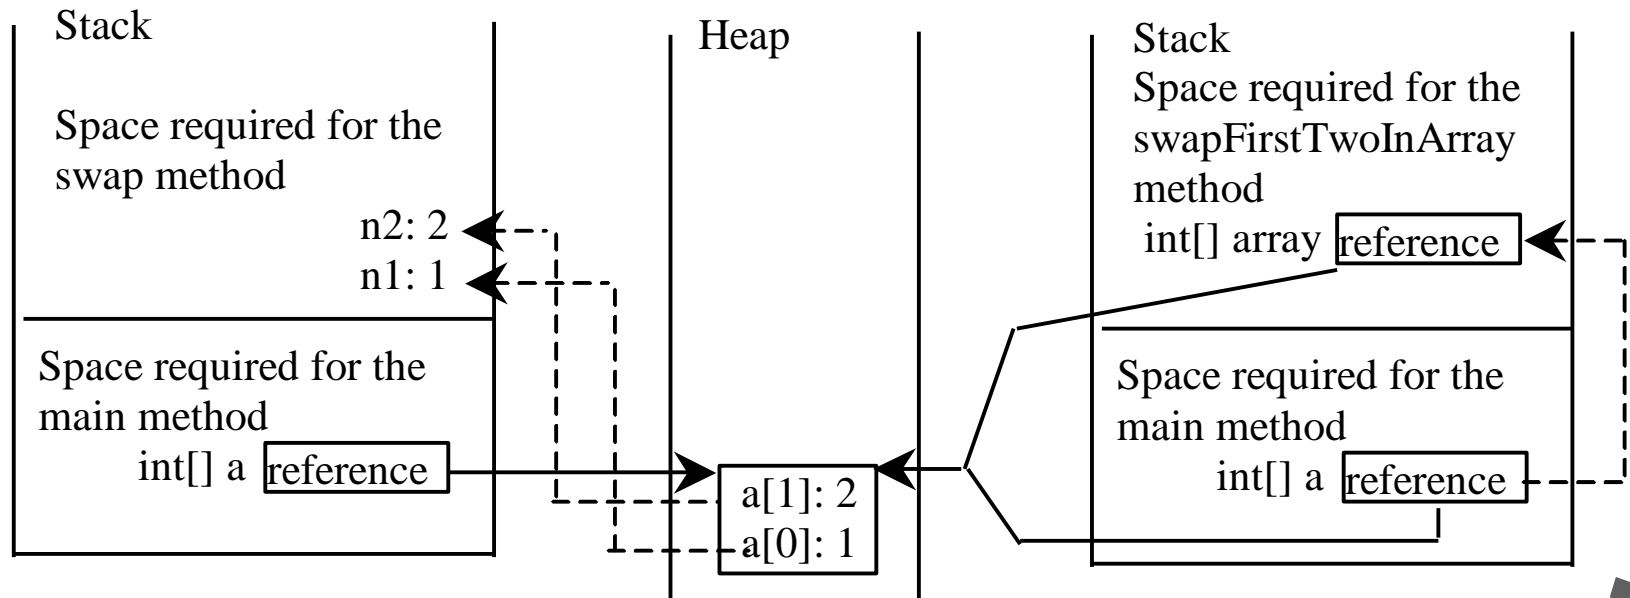

Invoke `swap(int n1, int n2)`.
The primitive type values in `a[0]` and `a[1]` are passed to the `swap` method.


The arrays are stored in a heap.

Invoke `swapFirstTwoInArray(int[] array)`.
The reference value in `a` is passed to the `swapFirstTwoInArray` method.

Returning an Array from a Method

```
public static int[] reverse(int[] list) {  
    int[] result = new int[list.length];  
  
    for (int i = 0, j = result.length - 1;  
        i < list.length; i++, j--) {  
        result[j] = list[i];  
    }  
  
    return result;  
}
```

```
int[] list1 = {1, 2, 3, 4, 5, 6};  
int[] list2 = reverse(list1);
```

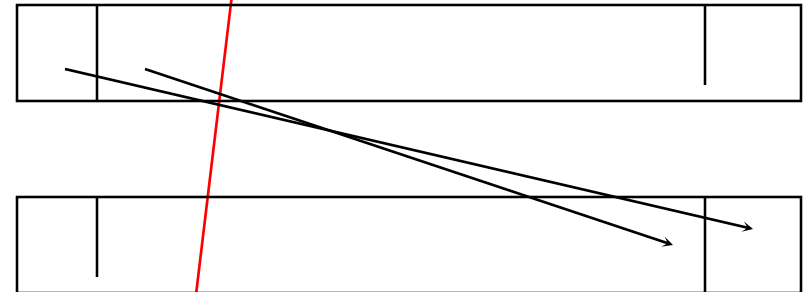


Trace the reverse Method

```
int[] list1 = {1, 2, 3, 4, 5, 6};  
int[] list2 = reverse(list1);
```

Declare result and create array

```
public static int[] reverse(int[] list) {  
    int[] result = new int[list.length];  
  
    for (int i = 0, j = result.length - 1;  
         i < list.length; i++, j--) {  
        result[j] = list[i];  
    }  
  
    return result;  
}
```

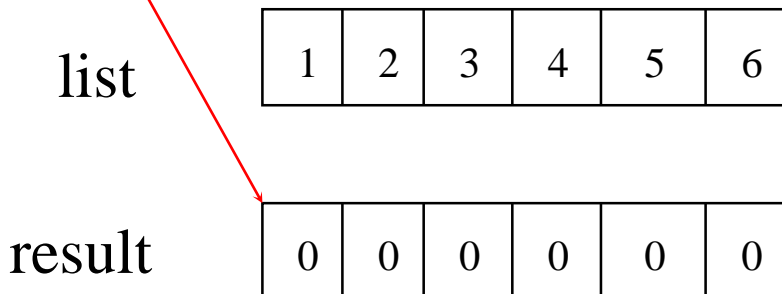


Trace the reverse Method, cont.

```
int[] list1 = {1, 2, 3, 4, 5, 6};  
int[] list2 = reverse(list1);
```

```
public static int[] reverse(int[] list) {  
    int[] result = new int[list.length];  
  
    for (int i = 0, j = result.length - 1;  
         i < list.length; i++, j--) {  
        result[j] = list[i];  
    }  
  
    return result;  
}
```

$i = 0$ and $j = 5$

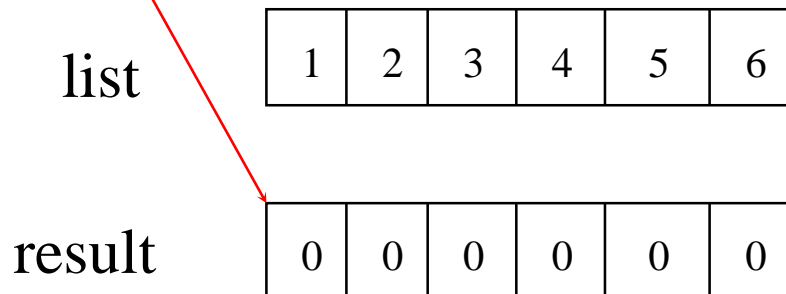

Trace the reverse Method, cont.

```
int[] list1 = {1, 2, 3, 4, 5, 6};  
int[] list2 = reverse(list1);
```

```
public static int[] reverse(int[] list) {  
    int[] result = new int[list.length];  
  
    for (int i = 0, j = result.length - 1;  
         i < list.length; i++, j--) {  
        result[j] = list[i];  
    }  
  
    return result;  
}
```

i (= 0) is less than 6

list

1	2	3	4	5	6
---	---	---	---	---	---

result

0	0	0	0	0	0
---	---	---	---	---	---




Trace the reverse Method, cont.

```
int[] list1 = {1, 2, 3, 4, 5, 6};  
int[] list2 = reverse(list1);
```

```
public static int[] reverse(int[] list) {  
    int[] result = new int[list.length];  
  
    for (int i = 0, j = result.length - 1;  
         i < list.length; i++, j--) {  
        result[j] = list[i];  
    }  
  
    return result;  
}
```

$i = 0$ and $j = 5$
Assign `list[0]` to `result[5]`

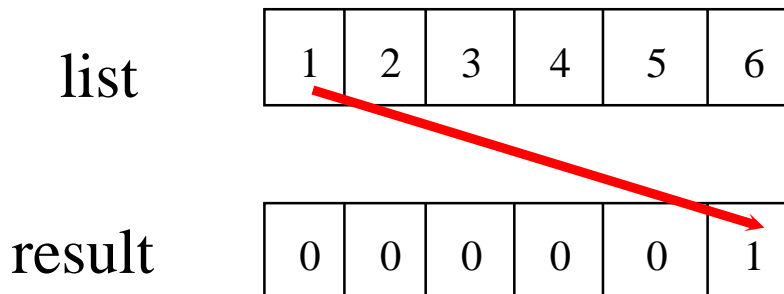

Trace the reverse Method, cont.

```
int[] list1 = {1, 2, 3, 4, 5, 6};  
int[] list2 = reverse(list1);
```

```
public static int[] reverse(int[] list) {  
    int[] result = new int[list.length];  
  
    for (int i = 0, j = result.length - 1;  
         i < list.length; i++, j--) {  
        result[j] = list[i];  
    }  
  
    return result;  
}
```

After this, i becomes 1 and j becomes 4

list

1	2	3	4	5	6
---	---	---	---	---	---

result

0	0	0	0	0	1
---	---	---	---	---	---



Trace the reverse Method, cont.

```
int[] list1 = {1, 2, 3, 4, 5, 6};  
int[] list2 = reverse(list1);
```

```
public static int[] reverse(int[] list) {  
    int[] result = new int[list.length];  
  
    for (int i = 0, j = result.length - 1;  
        i < list.length; i++, j--) {  
        result[j] = list[i];  
    }  
  
    return result;  
}
```

i (=1) is less than 6

list

1	2	3	4	5	6
---	---	---	---	---	---

result

0	0	0	0	0	1
---	---	---	---	---	---




Trace the reverse Method, cont.

```
int[] list1 = {1, 2, 3, 4, 5, 6};  
int[] list2 = reverse(list1);
```

```
public static int[] reverse(int[] list) {  
    int[] result = new int[list.length];  
  
    for (int i = 0, j = result.length - 1;  
         i < list.length; i++, j--) {  
        result[j] = list[i];  
    }  
  
    return result;  
}
```

$i = 1$ and $j = 4$
Assign `list[1]` to `result[4]`

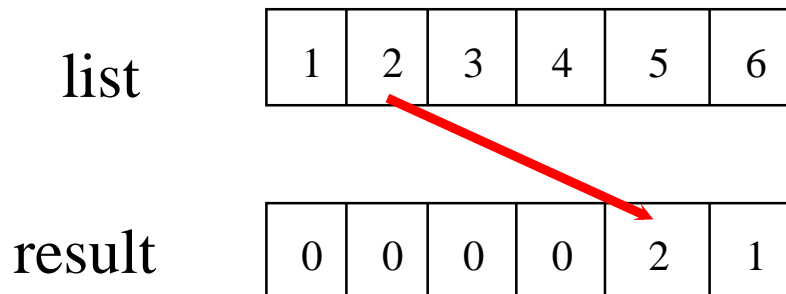

Trace the reverse Method, cont.

```
int[] list1 = {1, 2, 3, 4, 5, 6};  
int[] list2 = reverse(list1);
```

```
public static int[] reverse(int[] list) {  
    int[] result = new int[list.length];  
  
    for (int i = 0, j = result.length - 1;  
         i < list.length; i++, j--) {  
        result[j] = list[i];  
    }  
  
    return result;  
}
```

After this, i becomes 2 and
j becomes 3

list

1	2	3	4	5	6
---	---	---	---	---	---

result

0	0	0	0	2	1
---	---	---	---	---	---



Trace the reverse Method, cont.

```
int[] list1 = {1, 2, 3, 4, 5, 6};  
int[] list2 = reverse(list1);
```

```
public static int[] reverse(int[] list) {  
    int[] result = new int[list.length];  
  
    for (int i = 0, j = result.length - 1;  
        i < list.length; i++, j--) {  
        result[j] = list[i];  
    }  
  
    return result;  
}
```

i (=2) is still less than 6

list

1	2	3	4	5	6
---	---	---	---	---	---

result

0	0	0	0	2	1
---	---	---	---	---	---




Trace the reverse Method, cont.

```
int[] list1 = {1, 2, 3, 4, 5, 6};  
int[] list2 = reverse(list1);
```

```
public static int[] reverse(int[] list) {  
    int[] result = new int[list.length];  
  
    for (int i = 0, j = result.length - 1;  
         i < list.length; i++, j--) {  
        result[j] = list[i];  
    }  
  
    return result;  
}
```

$i = 2$ and $j = 3$
Assign $list[i]$ to $result[j]$

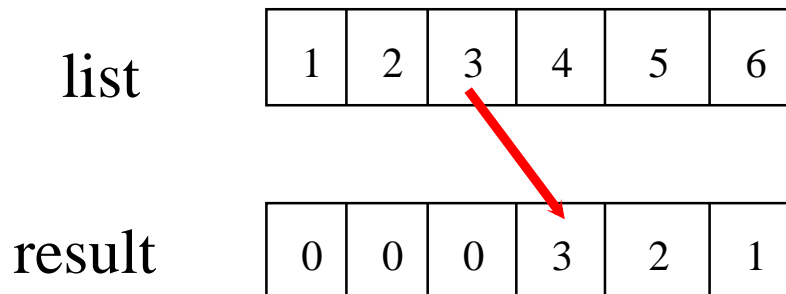

Trace the reverse Method, cont.

```
int[] list1 = {1, 2, 3, 4, 5, 6};
int[] list2 = reverse(list1);
```

```
public static int[] reverse(int[] list) {
    int[] result = new int[list.length];

    for (int i = 0, j = result.length - 1;
         i < list.length; i++, j--) {
        result[j] = list[i];
    }

    return result;
}
```

After this, i becomes 3 and
j becomes 2

list

1	2	3	4	5	6
---	---	---	---	---	---

result

0	0	0	3	2	1
---	---	---	---	---	---



Trace the reverse Method, cont.

```
int[] list1 = {1, 2, 3, 4, 5, 6};  
int[] list2 = reverse(list1);
```

```
public static int[] reverse(int[] list) {  
    int[] result = new int[list.length];  
  
    for (int i = 0, j = result.length - 1;  
        i < list.length; i++, j--) {  
        result[j] = list[i];  
    }  
  
    return result;  
}
```

i (=3) is still less than 6

list

1	2	3	4	5	6
---	---	---	---	---	---

result

0	0	0	3	2	1
---	---	---	---	---	---




Trace the reverse Method, cont.

```
int[] list1 = {1, 2, 3, 4, 5, 6};  
int[] list2 = reverse(list1);
```

```
public static int[] reverse(int[] list) {  
    int[] result = new int[list.length];  
  
    for (int i = 0, j = result.length - 1;  
         i < list.length; i++, j--) {  
        result[j] = list[i];  
    }  
  
    return result;  
}
```

$i = 3$ and $j = 2$
Assign `list[i]` to `result[j]`

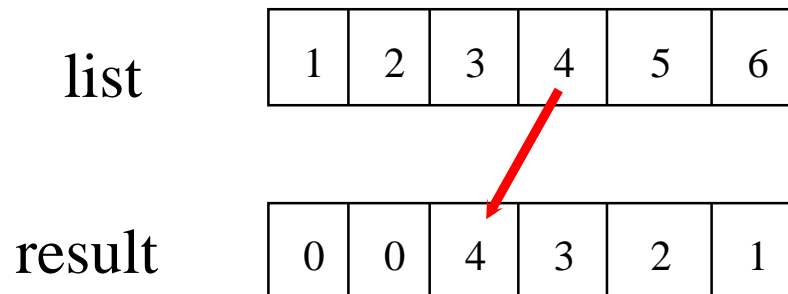

Trace the reverse Method, cont.

```
int[] list1 = {1, 2, 3, 4, 5, 6};
int[] list2 = reverse(list1);
```

```
public static int[] reverse(int[] list) {
    int[] result = new int[list.length];

    for (int i = 0, j = result.length - 1;
         i < list.length; i++, j--) {
        result[j] = list[i];
    }

    return result;
}
```

After this, i becomes 4 and j becomes 1

list

1	2	3	4	5	6
---	---	---	---	---	---

result

0	0	4	3	2	1
---	---	---	---	---	---



Trace the reverse Method, cont.

```
int[] list1 = {1, 2, 3, 4, 5, 6};
int[] list2 = reverse(list1);
```

```
public static int[] reverse(int[] list) {
    int[] result = new int[list.length];

    for (int i = 0, j = result.length - 1;
         i < list.length; i++, j--) {
        result[j] = list[i];
    }

    return result;
}
```

i (=4) is still less than 6

list

1	2	3	4	5	6
---	---	---	---	---	---

result

0	0	4	3	2	1
---	---	---	---	---	---




Trace the reverse Method, cont.

```
int[] list1 = {1, 2, 3, 4, 5, 6};  
int[] list2 = reverse(list1);
```

```
public static int[] reverse(int[] list) {  
    int[] result = new int[list.length];  
  
    for (int i = 0, j = result.length - 1;  
         i < list.length; i++, j--) {  
        result[j] = list[i];  
    }  
  
    return result;  
}
```

$i = 4$ and $j = 1$
Assign `list[i]` to `result[j]`

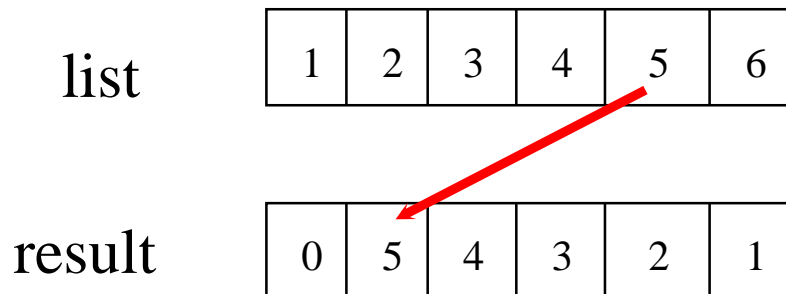

Trace the reverse Method, cont.

```
int[] list1 = {1, 2, 3, 4, 5, 6};  
int[] list2 = reverse(list1);
```

```
public static int[] reverse(int[] list) {  
    int[] result = new int[list.length];  
  
    for (int i = 0, j = result.length - 1;  
         i < list.length; i++, j--) {  
        result[j] = list[i];  
    }  
  
    return result;  
}
```

After this, i becomes 5 and
j becomes 0

list

1	2	3	4	5	6
---	---	---	---	---	---

result

0	5	4	3	2	1
---	---	---	---	---	---



Trace the reverse Method, cont.

```
int[] list1 = {1, 2, 3, 4, 5, 6};  
int[] list2 = reverse(list1);
```

```
public static int[] reverse(int[] list) {  
    int[] result = new int[list.length];  
  
    for (int i = 0, j = result.length - 1;  
        i < list.length; i++, j--) {  
        result[j] = list[i];  
    }  
  
    return result;  
}
```

i (=5) is still less than 6

list

1	2	3	4	5	6
---	---	---	---	---	---

result

0	5	4	3	2	1
---	---	---	---	---	---




Trace the reverse Method, cont.

```
int[] list1 = {1, 2, 3, 4, 5, 6};  
int[] list2 = reverse(list1);
```

```
public static int[] reverse(int[] list) {  
    int[] result = new int[list.length];  
  
    for (int i = 0, j = result.length - 1;  
         i < list.length; i++, j--) {  
        result[j] = list[i];  
    }  
  
    return result;  
}
```

$i = 5$ and $j = 0$
Assign $list[i]$ to $result[j]$

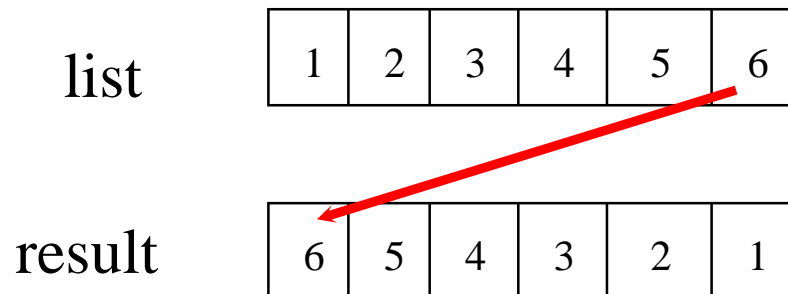

Trace the reverse Method, cont.

```
int[] list1 = {1, 2, 3, 4, 5, 6};  
int[] list2 = reverse(list1);
```

```
public static int[] reverse(int[] list) {  
    int[] result = new int[list.length];  
  
    for (int i = 0, j = result.length - 1;  
         i < list.length; i++, j--) {  
        result[j] = list[i];  
    }  
  
    return result;  
}
```

After this, i becomes 6 and
j becomes -1

list

1	2	3	4	5	6
---	---	---	---	---	---

result

6	5	4	3	2	1
---	---	---	---	---	---



Trace the reverse Method, cont.

```
int[] list1 = {1, 2, 3, 4, 5, 6};
int[] list2 = reverse(list1);
```

```
public static int[] reverse(int[] list) {
    int[] result = new int[list.length];

    for (int i = 0, j = result.length - 1;
        i < list.length; i++, j--) {
        result[j] = list[i];
    }

    return result;
}
```

$i (=6) < 6$ is false. So exit the loop.

list

1	2	3	4	5	6
---	---	---	---	---	---

result

6	5	4	3	2	1
---	---	---	---	---	---




Trace the reverse Method, cont.

```
int[] list1 = {1, 2, 3, 4, 5, 6};  
int[] list2 = reverse(list1);
```

```
public static int[] reverse(int[] list) {  
    int[] result = new int[list.length];  
  
    for (int i = 0, j = result.length - 1;  
         i < list.length; i++, j--) {  
        result[j] = list[i];  
    }  
  
    return result;  
}
```


Return result

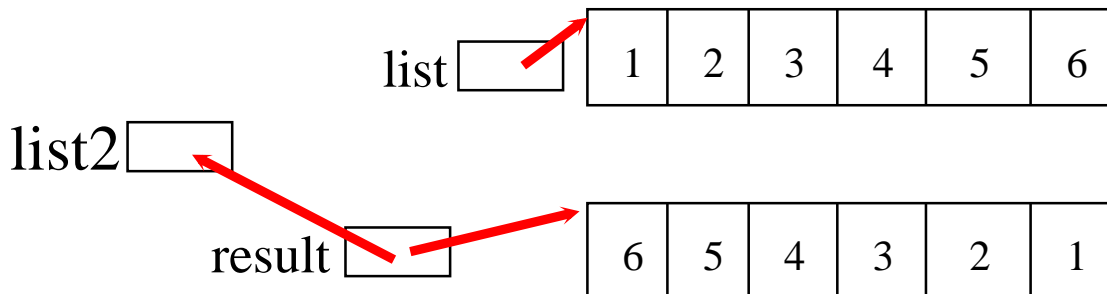

Searching Arrays

Searching is the process of looking for a specific element in an array; for example, discovering whether a certain score is included in a list of scores. Searching is a common task in computer programming. There are many algorithms and data structures devoted to searching. In this section, two commonly used approaches are discussed, *linear search* and *binary search*.

```
public class LinearSearch {  
    /** The method for finding a key in the list */  
    public static int linearSearch(int[] list, int key) {  
        for (int i = 0; i < list.length; i++)  
            if (key == list[i])  
                return i;  
        return -1;  
    }  
}
```

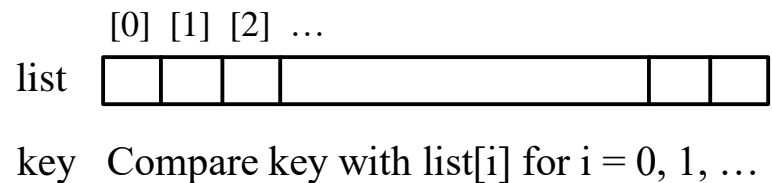

Linear Search

The linear search approach compares the key element, key, *sequentially* with each element in the array list. The method continues to do so until the key matches an element in the list or the list is exhausted without a match being found. If a match is made, the linear search returns the index of the element in the array that matches the key. If no match is found, the search returns -1.



Linear Search Animation

Key

List

3	6	4	1	9	7	3	2	8
3	6	4	1	9	7	3	2	8
3	6	4	1	9	7	3	2	8
3	6	4	1	9	7	3	2	8
3	6	4	1	9	7	3	2	8
3	6	4	1	9	7	3	2	8
3	6	4	1	9	7	3	2	8



Linear Search Animation

<https://liveexample.pearsoncmg.com/dsanimation/LinearSearchBook.html>



From Idea to Solution

```
/** The method for finding a key in the list */  
public static int linearSearch(int[] list, int key) {  
    for (int i = 0; i < list.length; i++)  
        if (key == list[i])  
            return i;  
    return -1;  
}
```

Trace the method

```
int[] list = {1, 4, 4, 2, 5, -3, 6, 2};  
int i = linearSearch(list, 4); // returns 1  
int j = linearSearch(list, -4); // returns -1  
int k = linearSearch(list, -3); // returns 5
```



Binary Search

For binary search to work, the elements in the array must already be ordered. Without loss of generality, assume that the array is in ascending order.

e.g., 2 4 7 10 11 45 50 59 60 66 69 70 79

The binary search first compares the key with the element in the middle of the array.



Binary Search, cont.

Consider the following three cases:

- If the key is less than the middle element, you only need to search the key in the first half of the array.
- If the key is equal to the middle element, the search ends with a match.
- If the key is greater than the middle element, you only need to search the key in the second half of the array.



Binary Search

Key

List

8	1	2	3	4	6	7	8	9
8	1	2	3	4	6	7	8	9
8	1	2	3	4	6	7	8	9



Binary Search Animation


<https://liveexample.pearsoncmg.com/dsanimation/BinarySearchBook.html>




Binary Search, cont.

key is 11


key < 50

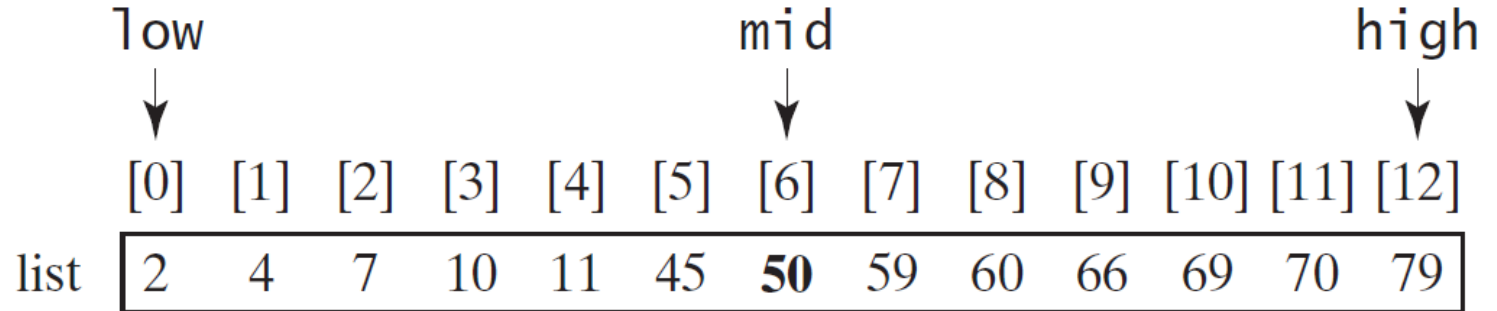

key > 7

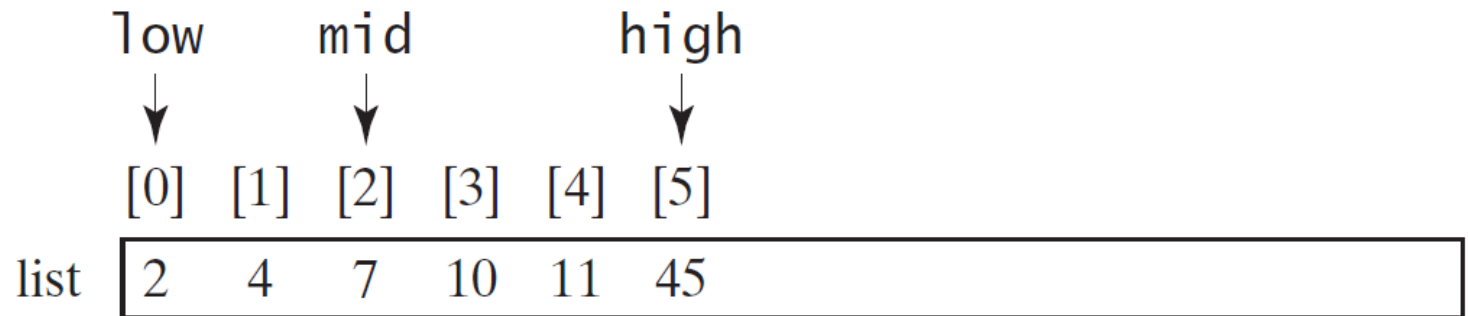


key == 11

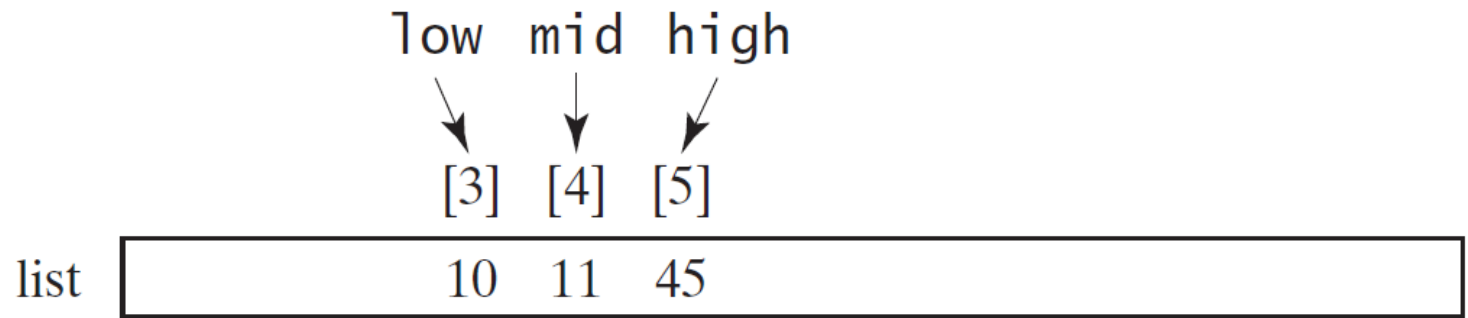


Binary Search, cont.

key is 54


key > 50

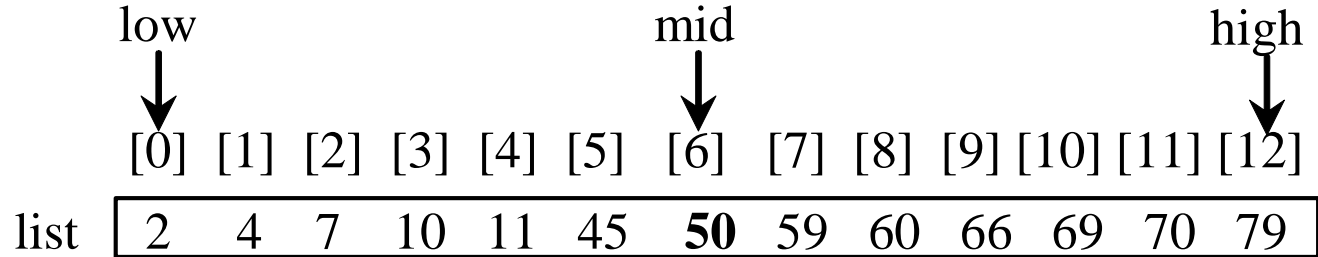

key < 66

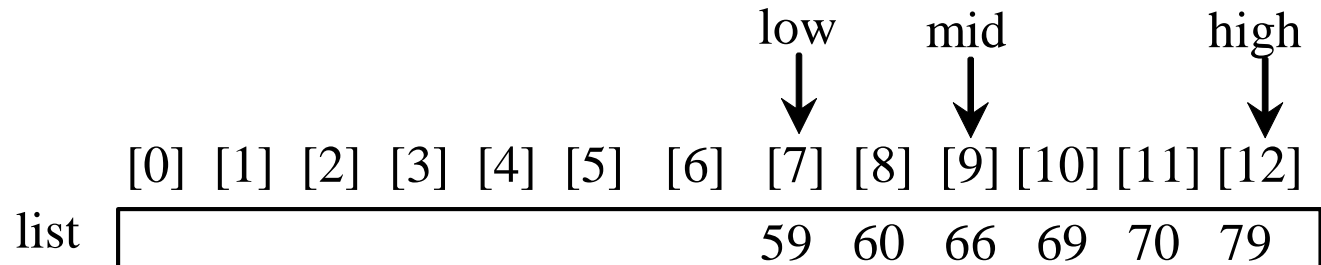

key < 59

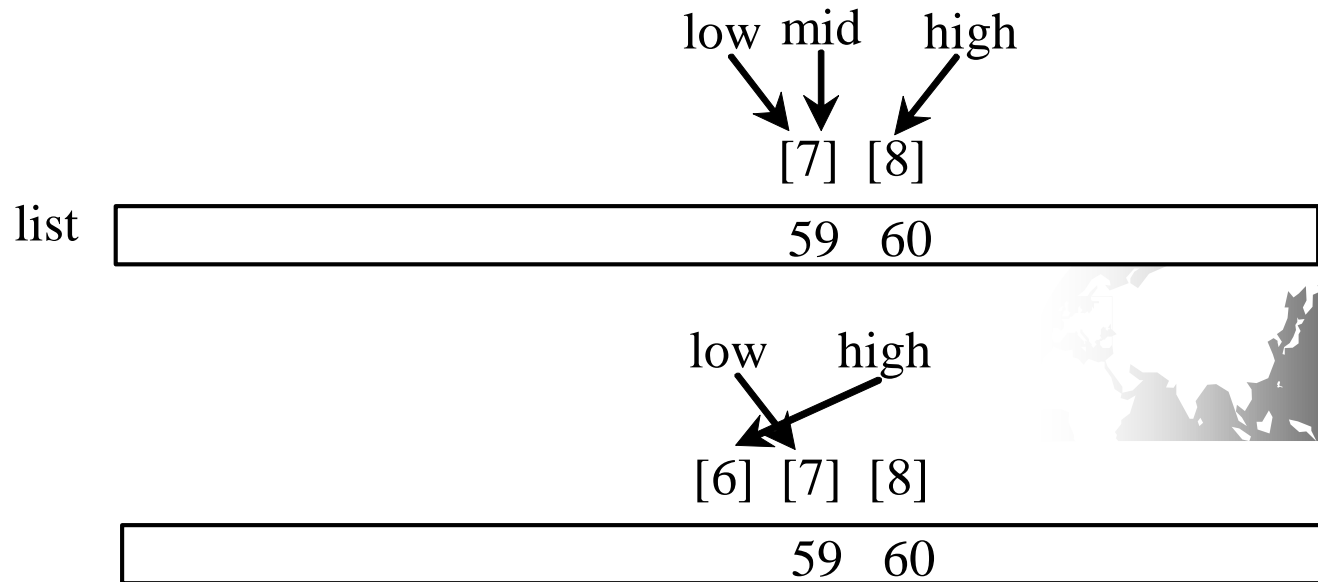

Binary Search, cont.

The `binarySearch` method returns the index of the element in the list that matches the search key if it is contained in the list. Otherwise, it returns

-insertion point - 1.

The insertion point is the point at which the key would be inserted into the list.



From Idea to Solution

```
/** Use binary search to find the key in the list */
public static int binarySearch(int[] list, int key) {
    int low = 0;
    int high = list.length - 1;

    while (high >= low) {
        int mid = (low + high) / 2;
        if (key < list[mid])
            high = mid - 1;
        else if (key == list[mid])
            return mid;
        else
            low = mid + 1;
    }

    return -1 - low;
}
```



The Arrays.binarySearch Method

Since binary search is frequently used in programming, Java provides several overloaded `binarySearch` methods for searching a key in an array of `int`, `double`, `char`, `short`, `long`, and `float` in the `java.util.Arrays` class. For example, the following code searches the keys in an array of numbers and an array of characters.

```
int[] list = {2, 4, 7, 10, 11, 45, 50, 59, 60, 66, 69, 70, 79};  
System.out.println("Index is " +  
    java.util.Arrays.binarySearch(list, 11));
```

Return is 4

```
char[] chars = {'a', 'c', 'g', 'x', 'y', 'z'};  
System.out.println("Index is " +  
    java.util.Arrays.binarySearch(chars, 't'));
```

Return is -4 (insertion point is 3, so return is -3-1)

For the `binarySearch` method to work, the array must be pre-sorted in increasing order.

Sorting Arrays


Sorting, like searching, is also a common task in computer programming. Many different algorithms have been developed for sorting. This section introduces a simple, intuitive sorting algorithm: *selection sort*.



Selection Sort


Selection sort finds the smallest number in the list and places it first. It then finds the smallest number remaining and places it second, and so on until the list contains only a single number.

Select 1 (the smallest) and swap it with 2 (the first) in the list.



2 9 5 4 8 1 6


The number 1 is now in the correct position and thus no longer needs to be considered.



1 9 5 4 8 2 6

Select 2 (the smallest) and swap it with 9 (the first) in the remaining list.

The number 2 is now in the correct position and thus no longer needs to be considered.



1 2 5 4 8 9 6

Select 4 (the smallest) and swap it with 5 (the first) in the remaining list.


The number 4 is now in the correct position and thus no longer needs to be considered.



1 2 4 5 8 9 6

5 is the smallest and in the right position. No swap is necessary.


The number 5 is now in the correct position and thus no longer needs to be considered.



1 2 4 5 8 9 6

Select 6 (the smallest) and swap it with 8 (the first) in the remaining list.

The number 6 is now in the correct position and thus no longer needs to be considered.



1 2 4 5 6 9 8

Select 8 (the smallest) and swap it with 9 (the first) in the remaining list.

The number 8 is now in the correct position and thus no longer needs to be considered.



1 2 4 5 6 8 9

Since there is only one element remaining in the list, the sort is completed.

Selection Sort Animation

<https://liveexample.pearsoncmg.com/dsanimation/SelectionSortNew.html>



From Idea to Solution

```
for (int i = 0; i < list.length; i++) {  
    select the smallest element in list[i..listSize-1];  
    swap the smallest with list[i], if necessary;  
    // list[i] is in its correct position.  
    // The next iteration apply on list[i+1..listSize-1]  
}
```

list[0]	list[1]	list[2]	list[3]	...	list[10]
list[0]	list[1]	list[2]	list[3]	...	list[10]
list[0]	list[1]	list[2]	list[3]	...	list[10]
list[0]	list[1]	list[2]	list[3]	...	list[10]
list[0]	list[1]	list[2]	list[3]	...	list[10]
list[0]	list[1]	list[2]	list[3]	...	list[10]
list[0]	list[1]	list[2]	list[3]	...	list[10]
list[0]	list[1]	list[2]	list[3]	...	list[10]

```
for (int i = 0; i < listSize; i++) {  
    select the smallest element in list[i..listSize-1];  
    swap the smallest with list[i], if necessary;  
    // list[i] is in its correct position.  
    // The next iteration apply on list[i..listSize-1]  
}
```

Expand

```
double currentMin = list[i];  
[redacted]  
for (int j = i+1; j < list.length; j++) {  
    if (currentMin > list[j]) {  
        currentMin = list[j];  
        [redacted]  
    }  
}
```



```
for (int i = 0; i < listSize; i++) {  
    select the smallest element in list[i..listSize-1];  
    swap the smallest with list[i], if necessary;  
    // list[i] is in its correct position.  
    // The next iteration apply on list[i..listSize-1]  
}
```

Expand

```
double currentMin = list[i];  
int currentMinIndex = i;  
for (int j = i; j < list.length; j++) {  
    if (currentMin > list[j]) {  
        currentMin = list[j];  
        currentMinIndex = j;  
    }  
}
```



```
for (int i = 0; i < listSize; i++) {  
    select the smallest element in list[i..listSize-1];  
    swap the smallest with list[i], if necessary;  
    // list[i] is in its correct position.  
    // The next iteration apply on list[i..listSize-1]  
}
```

Expand

```
if (currentMinIndex != i) {  
    list[currentMinIndex] = list[i];  
    list[i] = currentMin;  
}
```



Wrap it in a Method

```
/** The method for sorting the numbers */
```

```
public static void selectionSort(double[] list) {  
    for (int i = 0; i < list.length; i++) {  
        // Find the minimum in the list[i..list.length-1]  
        double currentMin = list[i];  
        int currentMinIndex = i;  
        for (int j = i + 1; j < list.length; j++) {  
            if (currentMin > list[j]) {  
                currentMin = list[j];  
                currentMinIndex = j;  
            }  
        }  
  
        // Swap list[i] with list[currentMinIndex] if necessary;  
        if (currentMinIndex != i) {  
            list[currentMinIndex] = list[i];  
            list[i] = currentMin;  
        }  
    }  
}
```

Invoke it
selectionSort(yourList)

The Arrays.sort Method

Since sorting is frequently used in programming, Java provides several overloaded sort methods for sorting an array of int, double, char, short, long, and float in the `java.util.Arrays` class. For example, the following code sorts an array of numbers and an array of characters.

```
double[] numbers = {6.0, 4.4, 1.9, 2.9, 3.4, 3.5};  
java.util.Arrays.sort(numbers);
```

```
char[] chars = {'a', 'A', '4', 'F', 'D', 'P'};  
java.util.Arrays.sort(chars);
```

Java 8 now provides `Arrays.parallelSort(list)` that utilizes the multicore for fast sorting.



Command-Line Parameters

```
class TestMain {  
    public static void main(String[] args) {  
        ...  
    }  
}
```

```
java TestMain arg0 arg1 arg2 ... argn
```



Processing Command-Line Parameters

In the main method, get the arguments from `args[0]`, `args[1]`, ..., `args[n]`, which corresponds to `arg0`, `arg1`, ..., `argn` in the command line.

