

Example 8

$$X(z) = \frac{1}{1 - az^{-1}}$$

$$|z| > a$$

$$X(z) = 1 + az^{-1} + a^2 z^{-2} + a^3 z^{-3} + \dots$$

$$= \sum_{n=0}^{\infty} X[n] z^{-n}$$

$$X(z) = \sum_{n=0}^{\infty} a^n z^{-n}$$

$$\Rightarrow X[n] = a^n u[n]$$

$$\begin{array}{r} 1 + az^{-1} + a^2 z^{-2} \\ \hline 1 - az^{-1} \cdot \frac{1}{1 - az^{-1}} \\ \hline az^{-1} \\ \hline az^{-1} - a^2 z^{-2} \\ \hline a^2 z^{-2} \\ \vdots \\ \vdots \\ \vdots \\ \vdots \end{array}$$

4 - Contour Integration =

$$X[n] = \frac{1}{2\pi j} \oint_C X(z) z^{n-1} dz$$

C complex integration

\* Z-transform properties

① Linearity

$$X[n] \xleftrightarrow{Z} X(z), \text{ ROC} = R_x$$

$$X_1[n] \xleftrightarrow{Z} X_1(z), \text{ ROC} = R_{x_1}$$

$$X_2[n] \xleftrightarrow{Z} X_2(z), \text{ ROC} = R_{x_2}$$

$$a X_1[n] + b X_2[n] \xleftrightarrow{Z} a X_1(z) + b X_2(z)$$

$$\text{ROC} = R_{x_1} \cap R_{x_2}$$

## 2-Time shifting

$$x[n] \xleftrightarrow{z} X(z)$$

$$x[n-n_0] \xleftrightarrow{\quad} X(z) z^{-n_0}$$

ROC =  $R_x$  (except for possible addition or deletion of  $z=0$  or  $z=\infty$ )

Example: let  $X(z) = \frac{1}{z-1/4}$ ,  $|z| > 1/4$

from ROC  $[|z| > 1/4]$   $x[n]$  is right-sided sequence

$$X(z) = \frac{z^{-1}}{1-1/4 z^{-1}} \quad |z| > 1/4$$

using the properties

$$X(z) = z^{-1} \left( \frac{1}{1-1/4 z^{-1}} \right) \xleftrightarrow{n_0=-1} X[n-n_0]$$

$$X[n] = \left(1/4\right)^{n-1} u[n-1]$$

OR

$$\frac{-1/4 z^{-1} + 1}{1-1/4 z^{-1}} = \frac{-1/4 z^{-1} + 1}{1-1/4 z^{-1}}$$

$$\text{So } X(z) = -1/4 + \frac{1/4}{1-1/4 z^{-1}}$$

$$X[n] = -1/4 \delta[n] + 1/4 \left(1/4\right)^{n-1} u[n-1]$$

Example 8- Suppose  $X(z)$  is given in the form

$$X(z) = z^2 (1 - \frac{1}{2}z^{-1}) (1 + z^{-1}) (1 - z^{-1})$$

Evaluate  $X[n]$

$$X(z) = z^2 (1 - \frac{1}{2}z^{-1}) (1 + z^{-1}) (1 - z^{-1})$$

$$= z^2 (1 - \frac{1}{2}z^{-1}) (1 - z^{-2})$$

$$= z^2 (1 - z^{-2} - \frac{1}{2}z^{-1} + \frac{1}{2}z^{-3})$$

$$= z^2 - \frac{1}{2}z - 1 + \frac{1}{2}z^{-1}$$

using shifting property

$$X[n] = 1 \delta[n+2] - \frac{1}{2} \delta[n+1] - \delta[n] + \frac{1}{2} \delta[n-1]$$

3- Multiplying by exponential sequence

$$X[n] \xleftrightarrow{z} X(z)$$

$$\sum_{n=-\infty}^{\infty} X[n] z_0^n \longleftrightarrow \sum_{n=-\infty}^{\infty} z_0^n X[n] z^{-n}$$

$$= \sum X[n] \left(\frac{z}{z_0}\right)^{-n}$$

$$= X\left(\frac{z}{z_0}\right)$$

Example 8 - Consider the following sequence

$$x[n] = r^n \cos(\omega_0 n) u[n]$$

Evaluate  $X(z)$

$$x[n] = r^n \cos(\omega_0 n) u[n]$$

$$= \frac{1}{2} r^n \underbrace{e^{j\omega_0 n}}_{(re^{j\omega_0})^n} u[n] + \frac{1}{2} r^n e^{-j\omega_0 n} u[n]$$

$$= \frac{1}{2} \frac{1}{1 - r e^{j\omega_0} z^{-1}} + \frac{1}{2} \frac{1}{1 - r e^{-j\omega_0} z^{-1}}$$

4 - Differentiation of  $X(z)$

$$x[n] \longleftrightarrow X(z)$$

$$n x[n] \longleftrightarrow -z \frac{dX(z)}{dz}, \text{ ROC} = R_x$$

Example  $X(z) = \log(1 + az^{-1}), |z| > |a|$

Evaluate  $x[n]$

$$\frac{dX(z)}{dz} = \frac{-1(az^{-2})}{1 + az^{-1}}$$

$$n x[n] \xleftrightarrow{z} -z \frac{dX(z)}{dz} = -z \left( \frac{-az^{-2}}{1 + az^{-1}} \right)$$

$$= \frac{az^{-1}}{1 + az^{-1}}$$

$$n x[n] = a(-a)^{n-1} u[n-1]$$

$$x[n] = \frac{a(-a)^{n-1} u[n-1]}{n}$$

$$= (-1)^{n-1} (a)^n u[n-1]$$

Example 0  $x[n] = na^n u[n]$ , evaluate  $X(z)$

$$x[n] = na^n u[n]$$

$$X(z) = -z \frac{d}{dz} \left( \frac{1}{1-az^{-1}} \right) \quad |z| > |a|$$

$$= -z \frac{-az^{-2}}{(1-az^{-1})^2}$$

$$= \frac{az^{-1}}{(1-az^{-1})^2}$$

$$n a^n u[n] \xleftrightarrow{z} \frac{az^{-1}}{(1-az^{-1})^2}$$

## 5- Conjugate of a complex sequence

$$X[n] \xleftrightarrow{z} X[z] \quad \text{ROC} = R_x$$

$$X^*[n] \xleftrightarrow{\quad} X^*(z^*) \quad \text{ROC} = R_x$$

## 6- Time Reversal

$$X[n] \xleftrightarrow{z} X[z]$$

$$X[-n] \xleftrightarrow{\quad} X^*(1/z^*)$$

$$X(z^{-1})$$

$$\text{ROC} = \frac{1}{R_x} \text{ and inverted}$$

Example:  $X[n] = a^{-n} u[-n]$

Evaluate  $X(z)$

$$a^n u[n] \xleftrightarrow{\quad} \frac{1}{1-az^{-1}} \quad \text{ROC} = R_x$$

$$a^{-n} u[-n] \xleftrightarrow{\quad} \frac{1}{1-aZ} = \frac{-a^{-1}z^{-1}}{1-a^{-1}z^{-1}}$$

$$|z| < a^{-1}$$

%

$$\text{ROC} = \frac{1}{R_x} = R_x^{-1}$$

## 7- Convolution Sequence

$$X_1[n] * X_2[z] \xleftrightarrow{z} X_1(z) X_2(z)$$

ROC contains  $R_{x1} \cap R_{x2}$

$$y[n] = \sum_{k=-\infty}^{\infty} x_1[k] x_2[n-k]$$

$$Y(z) = \sum_{n=-\infty}^{\infty} y[n] z^{-n}$$

$$= \sum_{k=-\infty}^{\infty} \sum_{n=-\infty}^{\infty} x_1[k] x_2[n-k] z^{-n}$$

$$= \sum_{k=-\infty}^{\infty} x_1[k] \sum_{n=-\infty}^{\infty} x_2[n-k] z^{-n}$$

let  $m = n - k$  at  $\begin{matrix} n = -\infty & m = -\infty \\ n = \infty & m = \infty \end{matrix}$

$$\sum_{k=-\infty}^{\infty} x_1[k] \sum_{m=-\infty}^{\infty} x_2(m) z^{-(m+k)}$$

$$= \sum_{k=-\infty}^{\infty} x_1[k] \left[ \sum_{m=-\infty}^{\infty} x_2(m) z^{-m} \right] z^{-k}$$

$$= \sum_{k=-\infty}^{\infty} x_1[k] z^{-k} \sum_{m=-\infty}^{\infty} x_2(m) z^{-m}$$

$$= X_1(z) X_2(z)$$


Examples  $X_1[n] = a^n u[n]$  and  $X_2[n] = u[n]$

Evaluate  $Y[n] = X_1[n] * X_2[n]$

$$X_1(z) = \frac{1}{1 - az^{-1}} \quad |z| > a$$

$$X_2(z) = \frac{1}{1 - z^{-1}} \quad |z| > 1$$

$$Y(z) = \frac{1}{(1 - az^{-1})(1 - z^{-1})} \quad |z| > 1$$

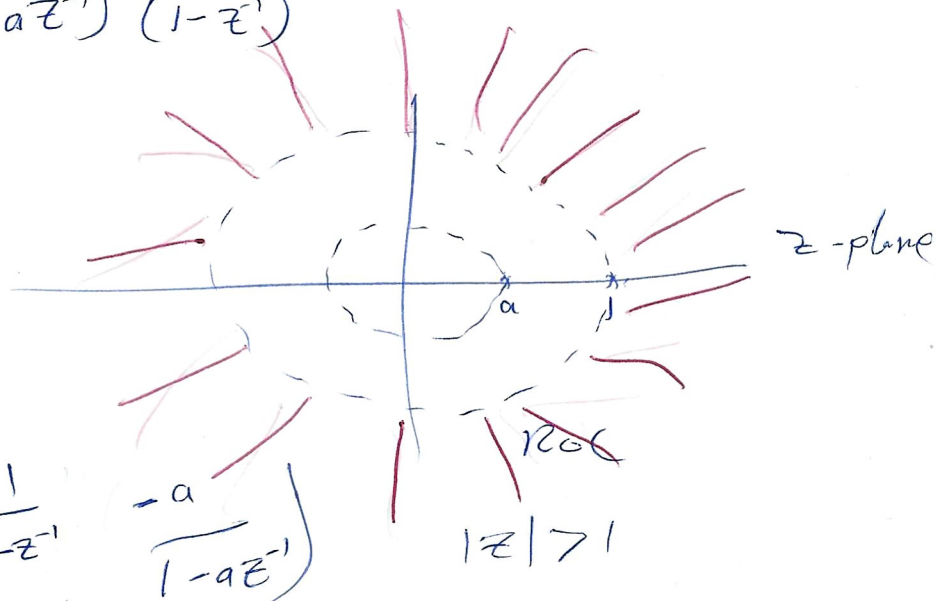

$$Y(z) = \frac{1}{1-a} \left( \frac{1}{1-z^{-1}} - \frac{a}{1-az^{-1}} \right) \quad |z| > 1$$

$$\therefore y[n] = \frac{1}{1-a} (u[n] - a a^n u[n])$$

$$= \left( \frac{1}{1-a} \right) [u[n] - a^{n+1} u[n]]$$

8- Initial value theorem

$X[n] \leftrightarrow X(z)$  and  $X[n]$  Causal

$$X[0] = \lim_{z \rightarrow \infty} X(z)$$