



Algorithm- 2

Computer Science Department

Iterative

- Control structure that **repeats** a set of actions (loop body) while some **condition** remains true or until some condition becomes false

(1)
WHILE condition
 actions
END WHILE

(3)
FOR iteration bounds
 actions
END FOR

(2)
REPEAT
 actions
UNTILE condition

Definite and Indefinite Loops

Looping may be achieved using either a **definite** loop or an **indefinite** loop:

- A **definite** loop is also referred to as a **counter-controlled** loop
 - The *loop body* will be executed a **specific** number of times.
- An **indefinite** loop is also referred to as a **sentinel-controlled** loop
 - The number of times the *body of the loop* should be executed can be **different** for each run of a program

Understanding the Loop in a Program's Mainline Logic

- **Three steps that should occur in every properly functioning loop**
 - Initialize** the variable that will control the loop (sentinel or counter value)
 - Test** the condition to determine whether the loop body executes
 - Update (aka alter)** the loop control variable
 - increment/decrement the lcv
 - get a new input value to compare to the sentinel value

Using a Counter-Controlled *while* loop


- As long as a **boolean expression** (the condition) remains true, the **while** loop's **body** executes.
- **Essential Steps:**
 - Create and **initialize** a loop control variable (lcv)
 - Determine the **upper or lower limit** for the lcv
 - Determine the **step** (increment or decrement) for the lcv
 - Determine the boolean expression (**condition**) that will control the loop
 - Each iteration of the loop, **update the lcv**

Counter Controlled **While** Loop

```

Set i equal to two
While i less than or equal six
    print i
    add two to i
end while
  
```


Output:
2 4 6

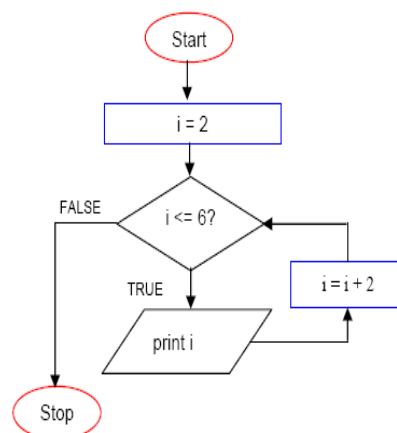

Using a Definite (Counter-Controlled) Loop

Must the condition be true or false for the loop body to be executed?


How many times is "Hello" displayed?

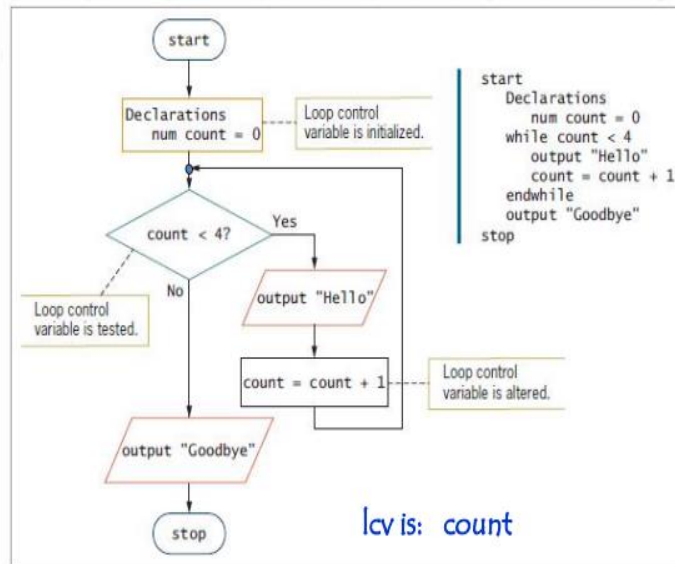

Using an Indefinite Loop (Sentinel-Controlled) with a Sentinel Value

- **Indefinite loop**
 - May be performed a different number of times each time the program executes
- **Essential steps:**
 - Identify a **sentinel value** (value outside the range of valid input data) that will be used as the loop exit condition
 - name = QUIT //where QUIT is a named constant sentinel value
 - End_of_input //RAPTOR sentinel module expression
 - Java → hasNext() == false //Java method to evaluate end of input condition
 - Each iteration of the loop get a new input value to compare to the sentinel value.


Example: Sentinel controlled indefinite loop

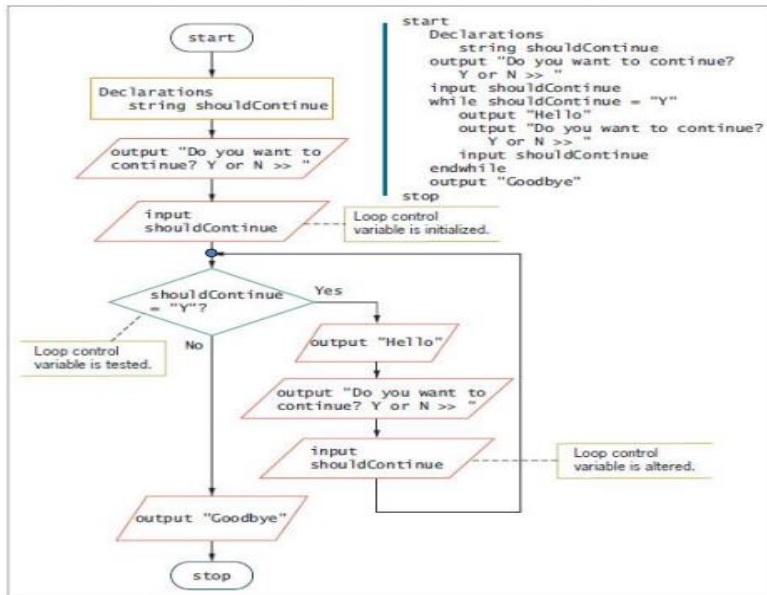


Common Loop Mistakes

- Neglecting to initialize the loop control variable
- Neglecting to update the loop control variable
- Loop executes one too many or one too few times
 - operator: < or <= OR > or >=
 - number of iterations = Last used – First used + 1
- Including statements inside the loop that belong outside the loop

Incorrect logic: lcv initialization is missing

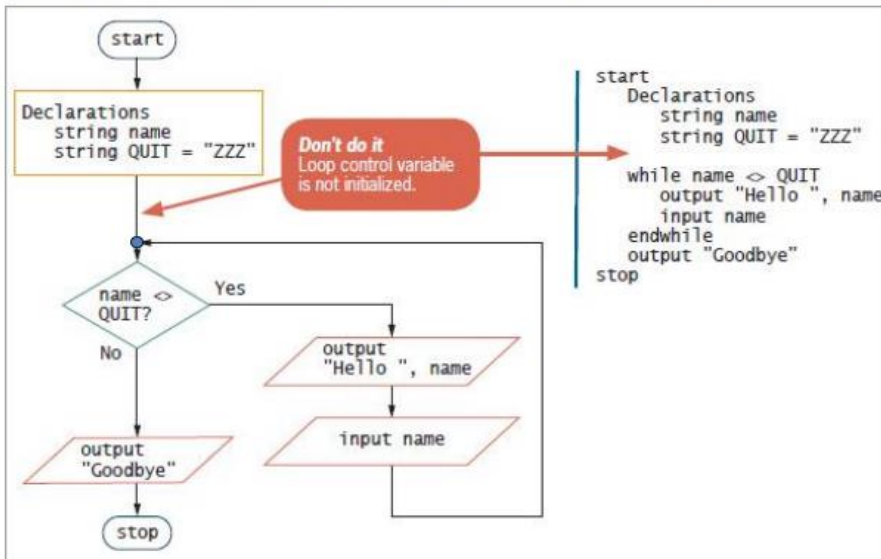

Incorrect logic: lcv is not altered

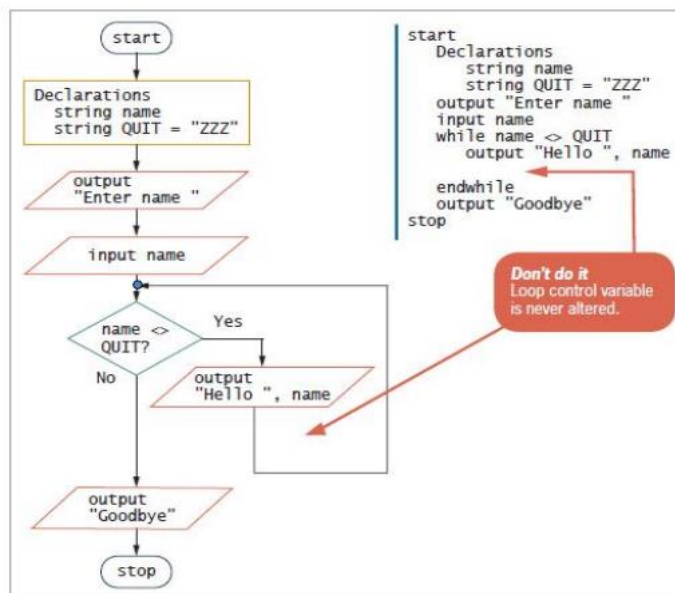

Counter Controlled - avg.

- Write an algorithm to calculate the average of a set of 10 students.

Solution 1

- Set **counter** to **zero**
- Set **total** to zero
- While **counter is less than ten**
 Ask user to enter grade
 Read grade and save as **gd**
 Add **gd** into the **total**
 increment **counter**
 end while
- Set the **average** to the **total** divided by **counter**
- Print "the average is " **average**

Solution 2

- Set **counter** to **one**
- Set **total** to zero
- While **counter is less than or equal ten**
 Ask user to enter grade
 Read grade and save as **gd**
 Add the **gd** into the **total**
 increment **counter**
 end while
- Set the **average** to the **total** divided by **10**
- Print "the average is " **average**

Please solve q1 page 12 –
sentinel controlled avg

Example 4

Write an algorithm that will count the number of student pass in a class and the amount failed. The pass mark is more than or equal to 65. Suppose the number of students are 52. The algorithm should **output** the *amount fail* and *passed*.

Example 4 – cont.

1. Set `counter` to `zero`
2. Set `numberOfStudents` to `52`
3. Set `passCounter` to `zero`
4. Set `failureCounter` to `zero`
5. While `counter` less than `numberOfStudents`
 - Ask user to enter student mark
 - Read mark and save as `mk`
 - if `mk` greater than or equal sixty five then
 - increment `passCounter`
 - else
 - increment `failureCounter`
 - end if
 - increment `counter`
6. Print "pass counter =" `passCounter` "and failure counter =" `failureCounter`

Message

Value

Please solve q2 page 12 - sentinel

Using a for Loop

- **for statement** or **for loop** is a definite loop
 - specifically, it is a pre-test loop
- Puts all of the loop control expressions in the **for loop header**:
 1. Initialize
 2. Test
 3. Update
- Takes the form: `[initial, final]`

```

for loopControlVariable = initialValue to finalValue [step
stepValue] do something
endfor

```


Using a for Loop – cont.

- Example pseudocode for loop

```

for count = 0 to 3 step 1      [0,3]
  output "Hello"
end for

```


- Initializes count to 0
- Checks count against the limit value 3 (test)
- If evaluation is true, for statement body prints the label
- Executes 4 times (last=3, first=0, 3-0+1 equals 4)
- Increases count by 1 (update)
- while loop:
 - count = 0
 - while count <= 3 or while count < 4
- Java for loop: for (count=0; count <= 3; count += 1)

Iterative - Repeat

1. Set j equal to negative five
2. Repeat
 - print j
 - increment j
 - until j less than or equal to zero

Output:

-5 -4 3 -2 -1 0

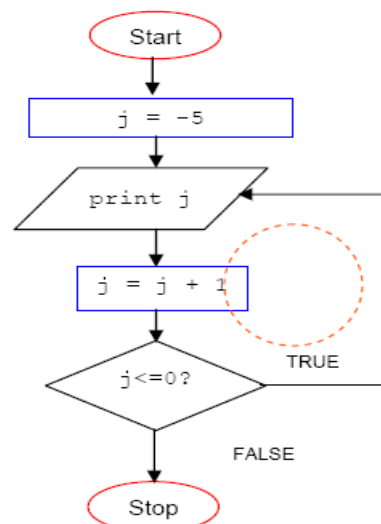

Write an algorithm to print the **sum of the digits** of a given number

Input a **Number**

Initialize **Sum** to zero

While **Number** is not zero

Get **Remainder** by **Number** Mod 10

Add **Remainder** to **Sum**

Divide **Number** by 10

End While

Print **Sum**

Lab 3-12: Factorial

Factorial function is defined as:

- If $N = 0$ then $N! = 1$
- If $N > 0$ then $N! = N(N - 1)$

1. Ask user to enter **N**

2. Read **N**

3. Set **Fact** = 1

4. If **N** equals 0 then

Set **Fact** = 1

Else

While **N** not equal 0

Set **Fact** = **Fact** * **N**

N = **N** - 1

End While

End If

5. Print **Fact**

$$0! = 1$$

$$1! = 1$$


$$2! = 1.2 = 2$$

$$3! = 1.2.3 = 6$$

$$4! = 1.2.3.4 = 24$$

$$5! = 1.2.3.4.5 = 120$$

$$6! = 1.2.3.4.5.6 = 720$$

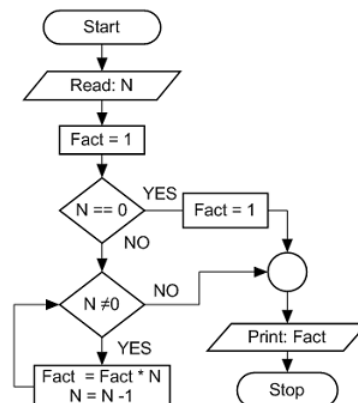

Please solve q4 page 12 in lab

LAB: Write an algorithm to calculate and print the **nth power of a number**.

If the user enters the number= 8 and n=3, the algorithm should calculate the value of $8^3= 8*8*8$ and print the result which is 512

```

Read base number as base
Read exponent as exponent
Set result to 1
while exponent not equal 0
    result = result * base
    decrement exponent
End While
Print result

```

Write an algorithm to print the sum of the following series , taking the first 7 terms. use only one loop. $A= 1! +2!+3!+4!+5!+6!+7!$

```

Set oldFact equal to one
Set counter equal to one
Set sum equal to zero
While counter in less than eight
    Set oldFact equal to oldFact multiply by counter
    Set sum equal to sum added by oldFact
    Increment counter
End while
Print sum

```

LAB: Write an algorithm to check if the number is **prime** or not

Input Any integer number (num)

Output Is it a prime number or Not

```

1 Set i to 2
2 While i less than or equal num/2
3   if num mod i = 0
4     print "Not a Prime number" and exit;
5   Increment i by 1
6 If (i is equal (num/2)+1)
7   print "Prime number"

```

Counter-Controlled while loop- Example 1

Write an Algorithm to **reverse** digits of an integer

Input: num

(1) Initialize rev = 0

(2) Loop while num > 0

(a) Multiply rev by 10 and add remainder of num to rev

$(rev = rev * 10 + num \% 10)$

(b) Divide num by 10

$(num = num / 10)$

(3) Return rev